

MEDIUM OUTPUT TAPELIGHT, 24V - OUTDOOR

SPECIFICATION:

Input Voltage	24 VDC
Wattage	2.2 W/ft
Output	<div style="display: flex; align-items: center;"> <div style="width: 15px; height: 15px; background-color: #FFD700; margin-right: 5px;"></div> 2700K - 206 lm/ft <div style="width: 15px; height: 15px; background-color: #FFFF00; margin-right: 5px; margin-top: 5px;"></div> 3000K - 214 lm/ft <div style="width: 15px; height: 15px; background-color: #ADD8E6; margin-right: 5px; margin-top: 5px;"></div> 3500K - 218 lm/ft </div>
CRI	90+
Dimmable	0-10V, ELV, MLV
Max. Run Length	60 ft
Field Cuttable	3.9" cut points
Beam Angle	120°
Operating Temp.	-40°F to 176°F
Warranty	3 year limited*
Adhesive	3M™ VHB mounting adhesive on back
Dimensions	W 0.39" (10mm)
IP Rating	IP65 - wet locations



Applications:

- Indoor signage
- Indirect lighting
- Accent lighting
- Undercabinet
- Furniture accents


Certifications:



* For full warranty information, please visit www.ledlightinginc.com/custom-LED-lights/warranty

PART NUMBER BUILDER / ORDERING GUIDE

Example part number: TSHL2835-300-27K-24V-90-R16

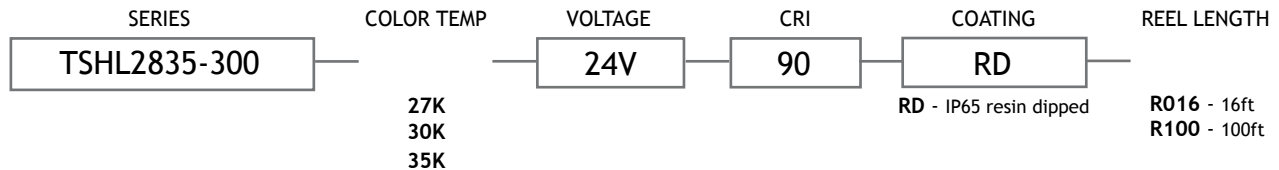

DIMENSIONS

