





We proudly introduce the LED Lighting Inc. catalog featuring our extensive range of lighting solutions.

Customizable LED Light Sources for every Application:


Linear, straight and curved, LED Lighting (White, RGB, RGBW, Tunable White, Single Color, Warm Fade, Line Voltage)
Interior, Exterior, Neon, Extrusions (Surface, Recessed, & Suspended Mount), Controls (RF, WIFI, DMX), Cove, Under
Cabinet, Exterior Perimeter Lighting, In-Ground, Mud-In, Wall Graze, Back Lighting, Retail Display.

EXTRUSION + LED TAPELIGHT	6 - 39
- Surface: Thin	6
- Surface: Deep	8
- Surface: Deep Wide	10
- Surface: Angled	12
- Surface: Angled 2	14
- Surface: Grazer	16
- Surface: Flex	18
- Surface: Icon	20
- Surface: Icon 1	22
- Surface: Closet Rod	24
- Recessed: Seamless 1.0	26
- Recessed: Seamless 2.0	28
- Recessed: Seamless Curve	30
- Recessed: Seamless Cove 2	32
- Recessed: Seamless Edge	34
- Recessed: Seamless Wallwash	36
- Suspended: Icon	38
 LED NEON.....	 40 - 45
- LED Neon White	40
- LED Neon Color	42
- LED Neon Addressable.....	44
 LED FIXTURES	 46 - 49
- Outdoor Washer / Grazer.....	46
- T-Grid Drop.....	48
 LED FLEX SHEETS.....	 50 - 51
- Flex Sheets	50
 LED TAPELIGHT.....	 52 - 65
- Static White Tapelight.....	52
- RGB/W Tapelight	54
- Static White 120V Tapelight.....	56
- COB Tapelight.....	58
- Warm Fade Tapelight.....	60
- Tunable Tapelight.....	62
- S-Flex Tapelight.....	64
 EXTRUSION & LED TAPELIGHT COMPATIBILITY CHART	 66 - 67
 POWER SUPPLIES & MODULES	 68 - 81
 CONTROLS	 82 - 89
 ACCESSORIES	 90 - 95

APPLICATIONS




BRAND RETAIL

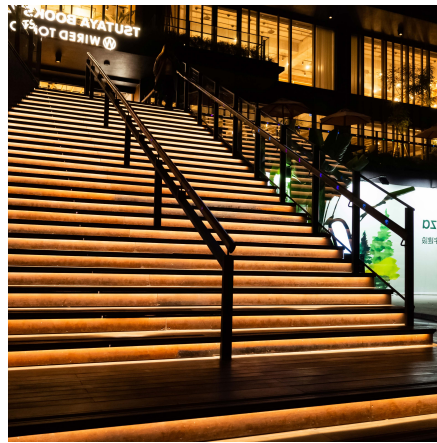


EXTERIOR



RESIDENTIAL

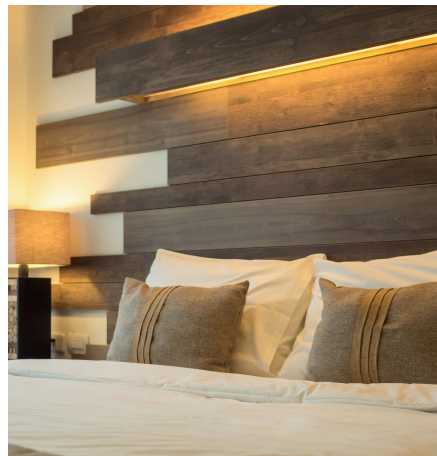

HOSPITALITY

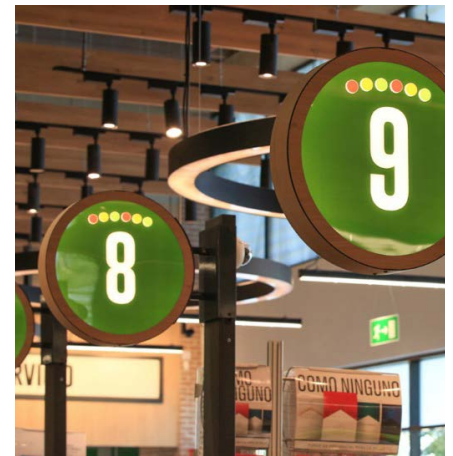

SIGNAGE



KIOSK



RETAIL

LED Lighting Inc. has been a leader in designing, engineering and manufacturing commercial LED lighting systems since 2004. Custom high-quality designs, thorough testing and strong warranties position our products as the leading standard in the OEM marketplace.

LED Lighting Inc. provides made-to-order linear LED lighting solutions. We design and manufacture surface, recessed, and suspended linear LED extrusions and systems.

The awesome team at LED Lighting Inc. custom-designs systems for manufacturers and point of purchase displays for POP, retail, hospitality, trade shows, booth manufacturers and retail display manufacturers.

Our industry-leading quick ship program delivers in-stock non-custom products and prototypes within 48 hours. We offer single-color, dynamic white, neon and programmable pixel RGBW linear LED lighting solutions as well as a comprehensive offering of surface, recessed and suspended mount extrusions.


LED Lighting Inc. is also certified with the ETCP, Entertainment Technician Certification Program.

Our customer focused engineering team is always ready to assist with job layouts.

HOW WE SELL


1 FACTORY BUILT

- Built to specification and pre-assembled (under 94.0") with soldered leads

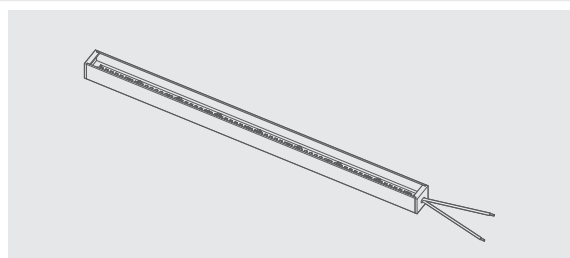


2 FIELD ASSEMBLED

- Pre-cut LED Tapelight with soldered leads
- Uncut Extrusion (sold as 48" or 94" in length)

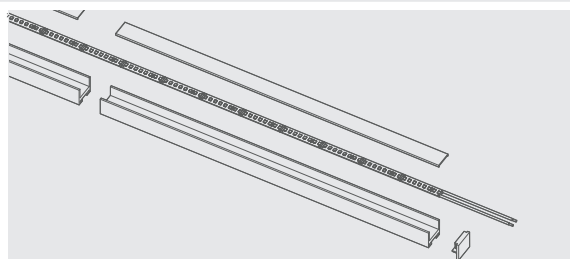

3 FIELD CONFIGURED

- Uncut LED Tapelight Reels
- Connectors & Jumpers
- Uncut Extrusion (sold as 48" or 94" in length)

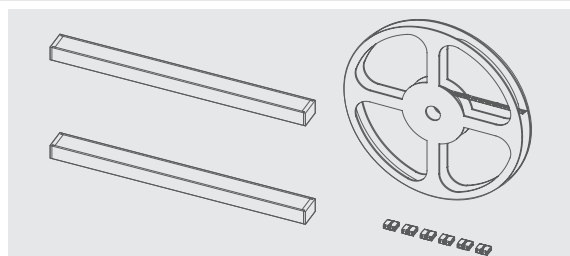

THIN EXTRUSION + LED



DESCRIPTION

Versatile, compact, all-purpose extrusion (just over ¼" depth)

Combine with high density LED tape to minimize diode imaging

Cost-effective solution that ships quick

Aluminum body protects LED tape to deliver optimal performance

Available in a flanged version for recessed applications

TECHNICAL INFORMATION

PART NUMBER	LED-THN-XX
FINISH	Silver Anodized, Black Powder Coat, White Powder Coat
LENS	Frosted, Clear, White
WATTAGE	1.5W/ft to 5.9W/ft
IP RATING	IP20 dry, IP65 wet
CCT / COLOR	2200K - 5200K; RGB; tunable white; warm fade
BEAM ANGLE	105° typical with Frosted lens
INPUT VOLTAGE	24V DC
LENGTH	Made to order. Actual lengths vary by LED tapelight cutpoints
OUTPUT	145 to 806 lm/ft
LEDS	Single binned LEDs +/- 30-70 CCT, MacAdam 3 SDCM
MATERIAL	Extrusion - Anodized aluminum; Lens - Polycarbonate
MOUNTING	Mounting clips recommended, Fixed or Adjustable clips available
POWER SUPPLY	Requires a 24V power supply

UNDER CABINET

As shown: LED-THN-SF-4.4W-27K-24V-3611

INSIDE CLOSET
As shown: LED-THN-SF-2.2W-27K-24V

TASK / ACCENT LIGHTING
As shown: LED-THN-SF-4.4W-27K-24V



DEEP EXTRUSION + LED



DESCRIPTION

Deep profile minimizes diode imaging

Diffuse lensing makes fixture ideal for direct-view installations

Cost-effective solution that ships quick

13° grazer lens available as an option

Available in a flanged version for recessed applications

TECHNICAL INFORMATION

PART NUMBER	LED-DEP-XX
FINISH	Silver Anodized, Black Powder Coat, White Powder Coat
LENS	Frosted, Clear, White, 15° Clear Grazing
WATTAGE	1.5W/ft to 7.6W/ft
IP RATING	IP20 dry, IP65 wet
CCT / COLOR	2200K - 5200K; RGB; RGBW; tunable white; warm fade
BEAM ANGLE	105° typical with Frosted lens
INPUT VOLTAGE	24V DC
LENGTH	Made to order. Actual lengths vary by LED tapelight cutpoints
OUTPUT	101 to 564 lm/ft
LEDs	Single binned LEDs +/- 30-70 CCT, MacAdam 3 SDCM
MATERIAL	Extrusion - Anodized aluminum; Lens - Polycarbonate
MOUNTING	Mounting clips recommended, Fixed or Adjustable clips available
POWER SUPPLY	Requires a 24V power supply



ACCENT LIGHTING
As shown: LED-DEP-SF-H5.9W-30K-24V



DEEP WIDE EXTRUSION + LED



DESCRIPTION

Wide profile accommodates both dry and wet location 24V Tapelight

Deep profile minimizes diode imaging

Aluminum body protects LED tape to deliver optimal performance

TECHNICAL INFORMATION

PART NUMBER	LED-DPW-XX
FINISH	Silver Anodized
LENS	Frosted or Clear
WATTAGE	1.5W/ft to 8.8W/ft
IP RATING	IP20 dry, IP65 wet, IP67 wet, IP68 wet,
CCT / COLOR	2200K - 5200K; RGB; RGBW; tunable white; warm fade
BEAM ANGLE	109° typical with Frosted lens
INPUT VOLTAGE	24V DC
LENGTH	Made to order. Actual lengths vary by LED tapelight cutpoints
OUTPUT	93 to 519 lm/ft
LEDs	Single binned LEDs +/- 30-70 CCT, MacAdam 3 SDCM
MATERIAL	Extrusion - Anodized aluminum; Lens - Polycarbonate
MOUNTING	Mounting clips recommended, Fixed or Adjustable clips available
POWER SUPPLY	Requires a 24V power supply



CEILING

As shown: LED-DPW-SF-8.8W-65-30K-24V

BLACKJACK LIGHTING (sister company)
10" Pillbox in Black with Gold Interior



ANGLED EXTRUSION + LED



DESCRIPTION

Great for corner applications like cabinets, coves, and displays
Curved lens provides maximum output and a side splash of light
Combine with high density LED tape to minimize diode imaging

TECHNICAL INFORMATION

PART NUMBER	LED-ANG-XX
FINISH	Silver Anodized, Black Powder Coat, White Powder Coat
LENS	Frosted, Clear, White
WATTAGE	1.5W/ft to 5.9W/ft
IP RATING	IP20 dry, IP65 wet
CCT / COLOR	2200K - 5200K; RGB; tunable white; warm fade
BEAM ANGLE	114° typical with Frosted lens
INPUT VOLTAGE	24V DC
LENGTH	Made to order. Actual lengths vary by LED tapelight cutpoints
OUTPUT	143 to 797 lm/ft
LEDs	Single binned LEDs +/- 30-70 CCT, MacAdam 3 SDCM
MATERIAL	Extrusion - Anodized aluminum; Lens - Polycarbonate
MOUNTING	Mounting clips recommended, Fixed or Adjustable clips available
POWER SUPPLY	Requires a 24V power supply





AMBIENT LIGHTING
As shown: LED-ANG-SF-4.4W-30K-24V

ANGLED 2 EXTRUSION + LED



DESCRIPTION

Wide profile accommodates both dry and wet location 24V Tapelight
Curved lens provides maximum output and a side splash of light
Larger profile minimizes diode imaging

TECHNICAL INFORMATION

PART NUMBER	LED-ANG2-XX
FINISH	Silver Anodized
LENS	Frosted
WATTAGE	1.5W/ft to 8.8W/ft
IP RATING	IP20 dry, IP65 wet, IP67 wet, IP68 wet
CCT / COLOR	2200K - 5200K; RGB; tunable white; warm fade
BEAM ANGLE	118° typical with Frosted lens
INPUT VOLTAGE	24V DC
LENGTH	Made to order. Actual lengths vary by LED tapelight cutpoints
OUTPUT	122 to 680 lm/ft
LEDS	Single binned LEDs +/- 30-70 CCT, MacAdam 3 SDCM
MATERIAL	Extrusion - Anodized aluminum; Lens - Polycarbonate
MOUNTING	Mounting clips recommended, Fixed clips available
POWER SUPPLY	Requires a 24V power supply





AMBIENT LIGHTING
As shown: LED-ANG2-SF-H6.6W-30K-24V

GRAZER EXTRUSION + LED



DESCRIPTION

Great for highlighting textured surfaces like stone and brick

Semi-Satin lens creates a crisp 14° beam spread

Delivers light output up to 12 feet from extrusion

Adjustable mounting bracket allows for perfect beam placement

TECHNICAL INFORMATION


PART NUMBER	LED-GZR-XX
FINISH	Silver Anodized
LENS	Semi-Satin
WATTAGE	1.5W/ft to 5.9W/ft
IP RATING	IP20 dry, IP65 wet
CCT / COLOR	2200K - 5200K; RGB; tunable white; warm fade
BEAM ANGLE	14° typical with Frosted lens
INPUT VOLTAGE	24V DC
LENGTH	Made to order. Actual lengths vary by LED tapelight cutpoints
OUTPUT	97 to 537 lm/ft
LEDS	Single binned LEDs +/- 30-70 CCT, MacAdam 3 SDCM
MATERIAL	Extrusion - Anodized aluminum; Lens - Polycarbonate
MOUNTING	Mounting clips recommended, Fixed or Adjustable clips available
POWER SUPPLY	Requires a 24V power supply

WALL GRAZING
As shown: LED-GZR-SS-4.4W-35K-24V

BLACKJACK LIGHTING (sister company)
20" Pillbox in Satin Nickel with White Interior



FLEX EXTRUSION + LED

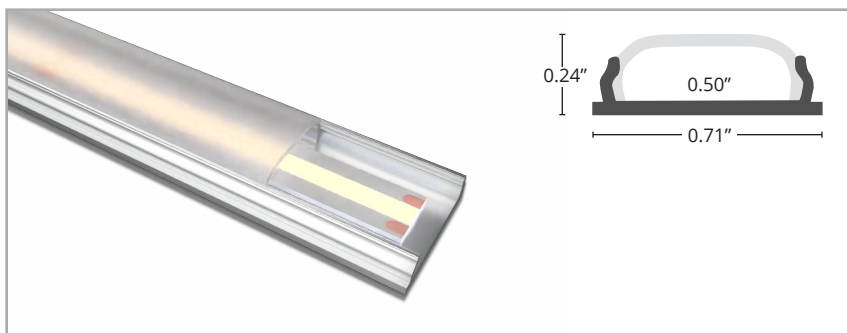

DESCRIPTION

Bend extrusion along a curved surface with a minimum 24" diameter

Low profile design perfect for discreet locations

Recommended to be used with the image free COB Tapelight

TECHNICAL INFORMATION

PART NUMBER	LED-FLX-XX
FINISH	Silver Anodized
LENS	Frosted or Clear
WATTAGE	1.5W/ft to 5.9W/ft
IP RATING	IP20 dry
CCT / COLOR	2200K - 5200K; RGB; tunable white; warm fade
BEAM ANGLE	107° typical with Frosted lens
INPUT VOLTAGE	24V DC
LENGTH	Made to order. Actual lengths vary by LED tapelight cutpoints
OUTPUT	145 to 806 lm/ft
LEDS	Single binned LEDs +/- 30-70 CCT, MacAdam 3 SDCM
MATERIAL	Extrusion - Anodized aluminum; Lens - Polycarbonate
MOUNTING	Mounting clips recommended, Fixed or Adjustable clips available
POWER SUPPLY	Requires a 24V power supply





ACCENT LIGHTING
As shown: LED-FLX-SF-CB4.6W-42K-24V

ICON EXTRUSION + LED




DESCRIPTION

Modular system that can be both suspended or surface mounted
Prefabricated corners available - no cutting required to achieve 90° turns
Accepts both 24V dry and wet location tapes
Accommodates double row tape for high output and even illumination

TECHNICAL INFORMATION

PART NUMBER	LED-ICN-XX
FINISH	Silver Anodized
LENS	Frosted
WATTAGE	1.5W/ft to 8.8W/ft
IP RATING	IP20 dry, IP65 wet, IP67 wet, IP68 wet
CCT / COLOR	2200K - 5200K; RGB; RGBW; tunable white; warm fade
BEAM ANGLE	109° typical with Frosted lens
INPUT VOLTAGE	24V DC
LENGTH	Made to order. Actual lengths vary by LED tapelight cutpoints
OUTPUT	80 to 412 lm/ft
LEDS	Single binned LEDs +/- 30-70 CCT, MacAdam 3 SDCM
MATERIAL	Extrusion - Anodized aluminum; Lens - Polycarbonate
MOUNTING	Mounting clips recommended, Fixed clips available
POWER SUPPLY	Requires a 24V power supply

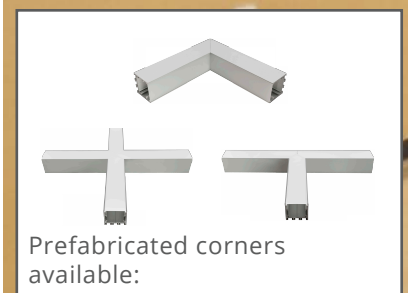

Prefabricated corners
available:



AMBIENT / ACCENT SYSTEM
As shown: LED-S-ICN-SF-H4.4W-35K-24V

ICON 1 EXTRUSION + LED




DESCRIPTION

Modular system that can be both suspended or surface mounted
Prefabricated corners available - no cutting required to achieve 90° turns
Accepts both 24V dry and wet location tapes

TECHNICAL INFORMATION

PART NUMBER	LED-IC1-XX
FINISH	Silver Anodized
LENS	Frosted
WATTAGE	1.5W/ft to 7.6W/ft
IP RATING	IP20 dry, IP65 wet, IP68 wet
CCT / COLOR	2200K - 5200K; RGB; RGBW; tunable white; warm fade
BEAM ANGLE	100°
INPUT VOLTAGE	24V DC
LENGTH	Made to order. Actual lengths vary by LED tapelight cutpoints
OUTPUT	76 to 421 lm/ft
LEDS	Single binned LEDs +/- 30-70 CCT, MacAdam 3 SDCM
MATERIAL	Extrusion - Anodized aluminum; Lens - Polycarbonate
MOUNTING	Mounting clips recommended, Fixed clips available
POWER SUPPLY	Requires a 24V power supply

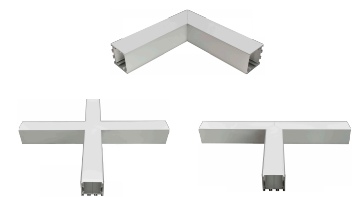

Prefabricated corners available:



AMBIENT / ACCENT SYSTEM
As shown: LED-IC1-SF-H4.4W-30K-24V

CLOSET ROD EXTRUSION + LED



DESCRIPTION

Closet Rod extrusion provides functional closet illumination


Doubles as a closet rod while illuminating articles underneath

TECHNICAL INFORMATION


PART NUMBER	LED-CLR-XX
FINISH	Silver Anodized
LENS	Frosted
WATTAGE	1.5W/ft to 7.6W/ft
IP RATING	IP20 dry, IP65 wet
CCT / COLOR	2200K - 5200K; RGB; RGBW; tunable white; warm fade
INPUT VOLTAGE	24V DC
LENGTH	Made to order. Actual lengths vary by LED tapelight cutpoints
OUTPUT	130 to 725 lm/ft
LEDS	Single binned LEDs +/- 30-70 CCT, MacAdam 3 SDCM
MATERIAL	Extrusion - Anodized aluminum; Lens - Polycarbonate
MOUNTING	Support brackets included
POWER SUPPLY	Requires a 24V power supply

CLOSET LIGHT

As shown: LED-CLR-SF-2.2W-27K-24V

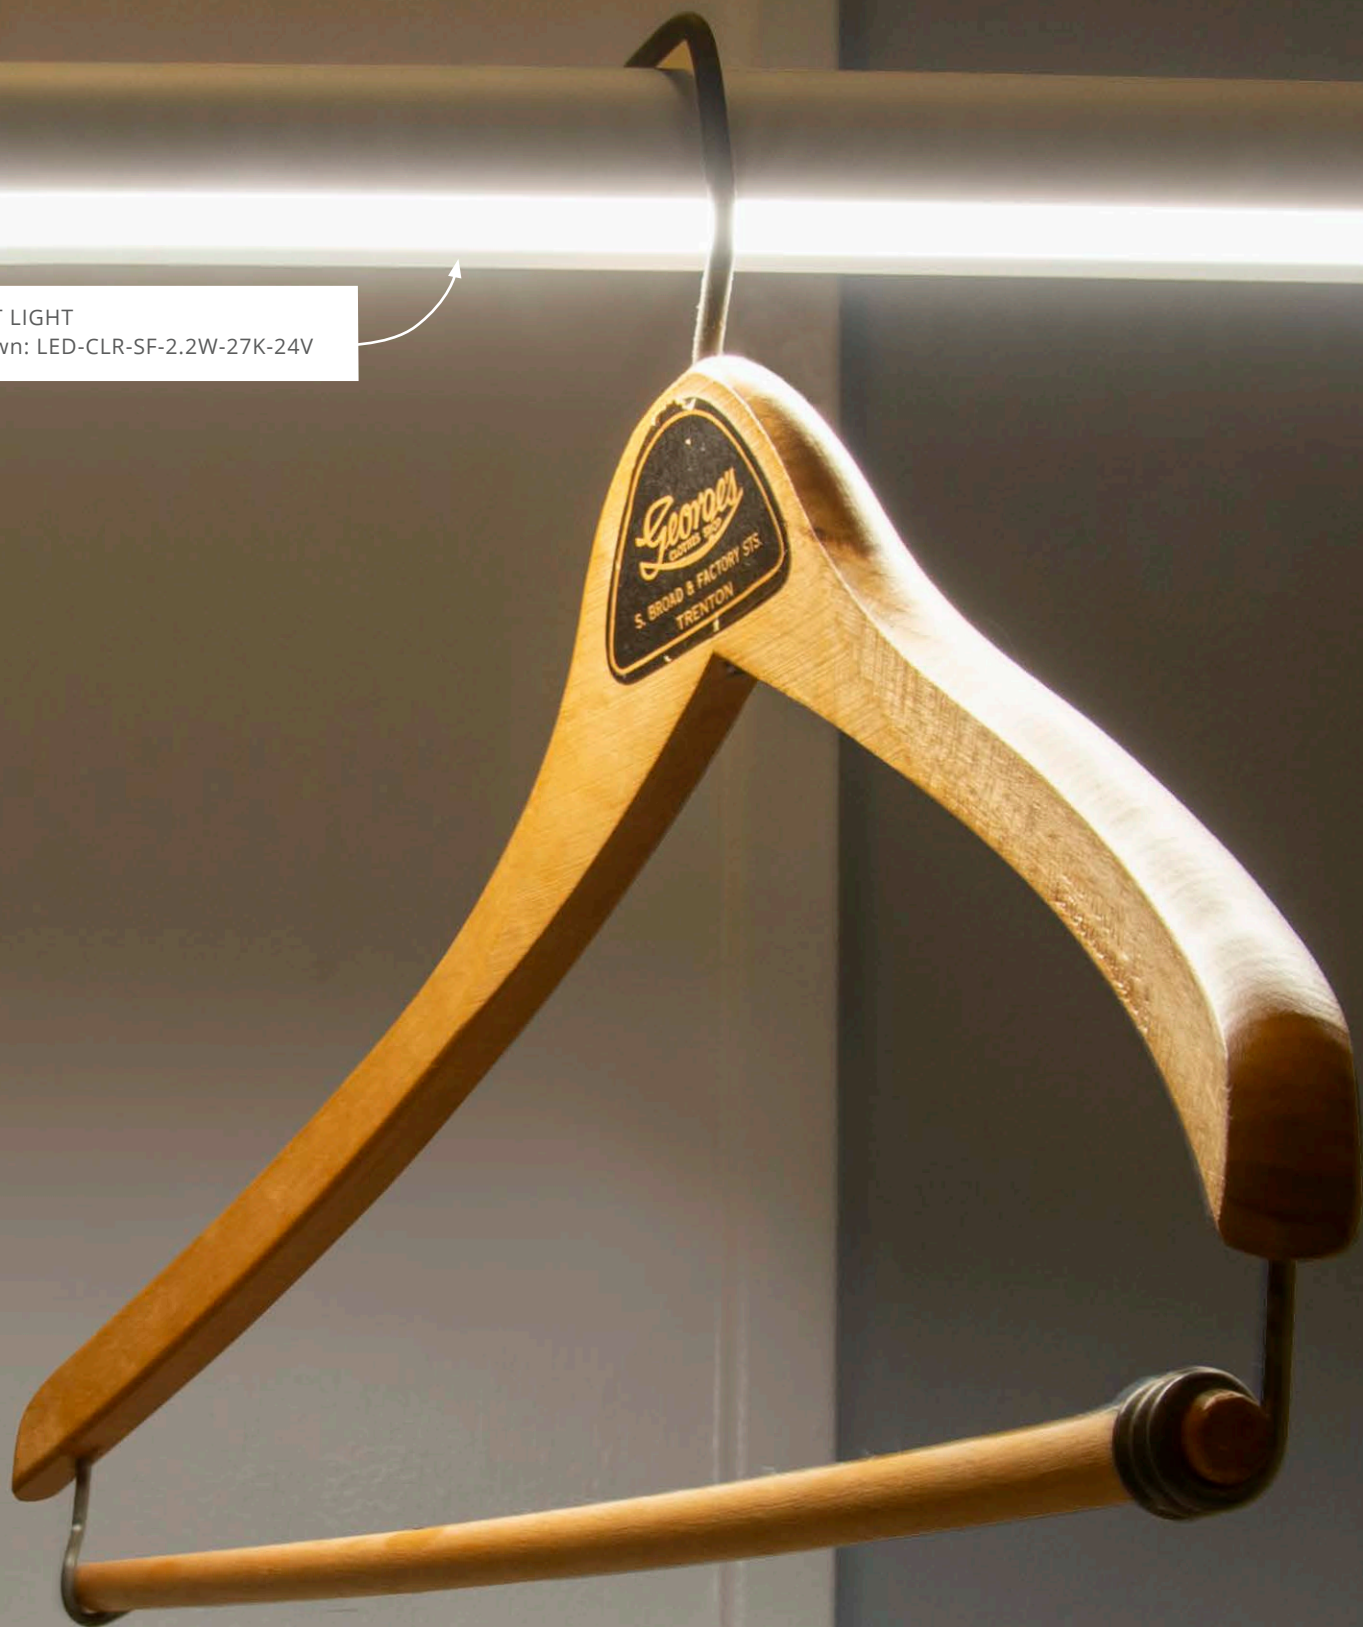

SEAMLESS 1.0 EXTRUSION + LED

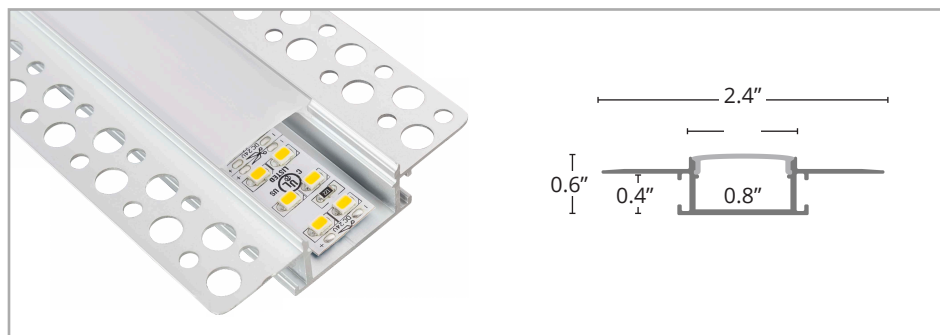


DESCRIPTION

Mud-in solution that creates clean lines of light in the architecture
Extrusion fits in 1/2" and 5/8" drywall with no need to modify wall studs
Accommodates double row tape for high output and even illumination
Factory Assembled X, T, and L corners available

TECHNICAL INFORMATION

PART NUMBER	LED-SM1-XX
FINISH	Silver
LENS	Frosted
WATTAGE	1.5W/ft to 8.8W/ft
IP RATING	IP20 dry, IP65 wet, IP67 wet, IP68 wet
CCT / COLOR	2200K - 5200K; RGB; RGBW; tunable white; warm fade
BEAM ANGLE	105° typical with Frosted lens
INPUT VOLTAGE	24V DC
LENGTH	Made to order. Actual lengths vary by LED tapelight cutpoints
OUTPUT	124 to 689 lm/ft
LEDs	Single binned LEDs +/- 30-70 CCT, MacAdam 3 SDCM
MATERIAL	Extrusion - Anodized aluminum; Lens - Polycarbonate
MOUNTING	Screws and Plaster recommended
POWER SUPPLY	Requires a 24V power supply




Prefabricated X, T and L corners available

AMBIENT LIGHTING
As shown: LED-SM1-SF-H6.6W-35K-24V



SEAMLESS 2.0 EXTRUSION + LED

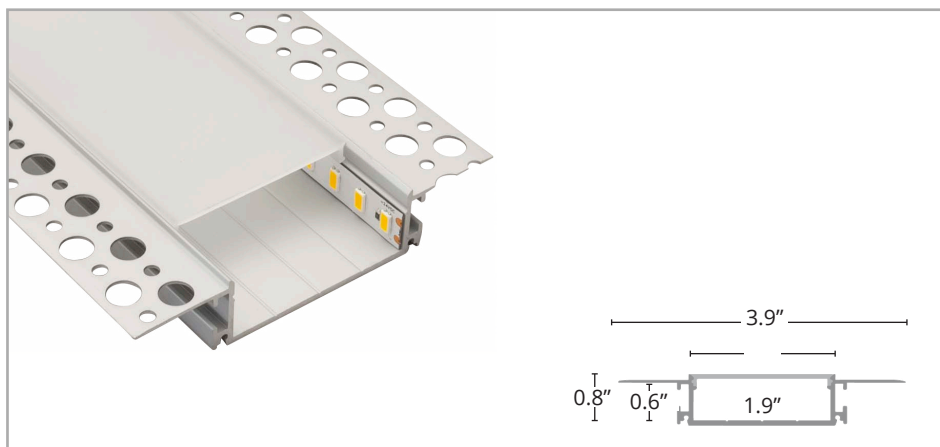

DESCRIPTION

Wide, crisp line of light with no diode imaging

Extrusion fits in 5/8" drywall with no need to modify wall studs

Factory Assembled X, T, and L corners available

TECHNICAL INFORMATION

PART NUMBER	LED-SM2-XX
FINISH	Silver Anodized
LENS	Frosted
WATTAGE	5.0W/ft to 11.8W/ft
IP RATING	IP20 dry, IP65 wet
CCT / COLOR	2200K - 5200K; RGB; tunable white; warm fade
BEAM ANGLE	109° typical with Frosted lens
INPUT VOLTAGE	24V DC
LENGTH	Made to order. Actual lengths vary by LED tapelight cutpoints
OUTPUT	199 to 841 lm/ft
LEDs	Single binned LEDs +/- 30-70 CCT, MacAdam 3 SDCM
MATERIAL	Extrusion - Anodized aluminum; Lens - Polycarbonate
MOUNTING	Screws and Plaster recommended
POWER SUPPLY	Requires a 24V power supply



Prefabricated X, T and L corners available



AMBIENT / ACCENT LIGHTING
As shown: LED-SM2-SF-H8.8W-35K-24V

SEAMLESS CURVE + LED



DESCRIPTION

Compatible 5/8" drywall (no stud notching)

Create dynamic visual interest and illumination

Mud-in extrusion with an uplight or downlight orientation

Ideal for accent and general lighting

TECHNICAL INFORMATION

PART NUMBER	LED-SMC-XX
FINISH	White Powder Coat
LENS	Frosted
WATTAGE	1.5W/ft to 7.6W/ft
IP RATING	IP20 dry, IP65 wet
CCT / COLOR	2200K - 5200K; RGB; RGBW; tunable white; warm fade
BEAM ANGLE	63° typical with Frosted lens
INPUT VOLTAGE	24V DC
LENGTH	Made to order. Actual lengths vary by LED tapelight cutpoints
OUTPUT	93 to 519 lm/ft
LEDs	Single binned LEDs +/- 30-70 CCT, MacAdam 3 SDCM
MATERIAL	Extrusion - Anodized aluminum; Lens - Polycarbonate
MOUNTING	Screws and Plaster recommended
POWER SUPPLY	Requires a 24V power supply



ACCENT DOWNLIGHT
As shown: LED-SMC-WF-2.5W-27K-24V

SEAMLESS COVE 2 + LED



DESCRIPTION

Compatible with 1/2" and 5/8" drywall (no stud notching)

Mud-in extrusion flawlessly blends into architecture

Mud-in extrusion with an uplight or downlight orientation

Ideal for accent and general lighting

TECHNICAL INFORMATION

PART NUMBER	LED-SCV2-XX
FINISH	White Powder Coat
LENS	Frosted
WATTAGE	1.5W/ft to 8.8W/ft
IP RATING	IP20 dry, IP65 wet, IP67 wet, IP68 wet
CCT / COLOR	2200K - 5200K; RGB; RGBW; tunable white; warm fade
BEAM ANGLE	106° typical with Frosted lens
INPUT VOLTAGE	24V DC
LENGTH	Made to order. Actual lengths vary by LED tapelight cutpoints
OUTPUT	98 to 546 lm/ft
LEDs	Single binned LEDs +/- 30-70 CCT, MacAdam 3 SDCM
MATERIAL	Extrusion - Anodized aluminum; Lens - Polycarbonate
MOUNTING	Screws and Plaster recommended
POWER SUPPLY	Requires a 24V power supply





COVE UPLIGHT

As shown: LED-SCV2-WF-H6.6WW-30K-24V

SEAMLESS EDGE + LED



DESCRIPTION

Mud-in extrusion to create illuminated coves / architectural interest

Mount in uplight, downlight, or sidelight orientations

No obtrusive profiles or canopies

TECHNICAL INFORMATION


PART NUMBER	LED-SME-XX
FINISH	White Powder Coat
LENS	Frosted
WATTAGE	1.5W/ft to 7.6W/ft
IP RATING	IP20 dry, IP65 wet
CCT / COLOR	2200K - 5200K; RGB; RGBW; tunable white; warm fade
BEAM ANGLE	50° typical with Frosted lens
INPUT VOLTAGE	24V DC
LENGTH	Made to order. Actual lengths vary by LED tapelight cutpoints
OUTPUT	81 to 448 lm/ft
LEDS	Single binned LEDs +/- 30-70 CCT, MacAdam 3 SDCM
MATERIAL	Extrusion - Anodized aluminum; Lens - Polycarbonate
MOUNTING	Screws and Plaster recommended
POWER SUPPLY	Requires a 24V power supply





ILLUMINATED COVE / TOE-KICK
As shown: LED-SME-WF-2.5W-30K-24V

SEAMLESS WALLWASH + LED

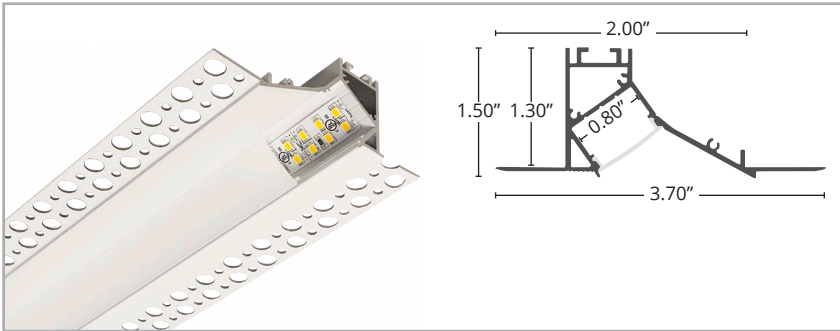

DESCRIPTION

Minimalist, refined approach to area illumination

Mud-in extrusion with a downlight orientation

Ideal for wall washing applications (105° beam angle)

No obtrusive profiles or canopies

Seamless extrusions with LEDs are pre-assembled in the USA

TECHNICAL INFORMATION

PART NUMBER	LED-SWW-XX
FINISH	White Powder Coat
LENS	Frosted
WATTAGE	1.5W/ft to 8.8W/ft
IP RATING	IP20 dry, IP65 wet, IP67 wet, IP68 wet
CCT / COLOR	2200K - 5200K; RGB; RGBW; tunable white; warm fade
BEAM ANGLE	105° typical with Frosted lens
INPUT VOLTAGE	24V DC
LENGTH	Made to order. Actual lengths vary by LED tapelight cutpoints
OUTPUT	72 to 403 lm/ft
LEDS	Single binned LEDs +/- 30-70 CCT, MacAdam 3 SDCM
MATERIAL	Extrusion - Anodized aluminum; Lens - Polycarbonate
MOUNTING	Screws and Plaster recommended
POWER SUPPLY	Requires a 24V power supply





WALL-WASHING

As shown: LED-SWW-WF-2.2W-30K-24V

ICON SUSPENDED EXTRUSION + LED



DESCRIPTION

Modular suspended system with prefabricated components

Accepts both 24V dry and wet location tapes

Accommodates double row tape for high output and even illumination

Factory Assembled X, T, and L corners available

TECHNICAL INFORMATION


PART NUMBER	LED-S-ICN-XX
FINISH	Silver Anodized
LENS	Frosted
WATTAGE	1.5W/ft to 8.8W/ft
IP RATING	IP20 dry, IP65 wet, IP67 wet, IP68 wet
CCT / COLOR	2200K - 5200K; warm fade
BEAM ANGLE	104° typical with Frosted lens
INPUT VOLTAGE	24V DC
LENGTH	Made to order. Actual lengths vary by LED tapelight cutpoints
OUTPUT	80 to 412 lm/ft
LEDs	Single binned LEDs +/- 30-70 CCT, MacAdam 3 SDCM
MATERIAL	Extrusion - Anodized aluminum; Lens - Polycarbonate
MOUNTING	Suspension Cables
POWER SUPPLY	Requires a 24V power supply





TASK / AMBIENT LIGHTING
As shown: LED-S-ICN-SF-H6.6W-35K-24V

LED NEON WHITE

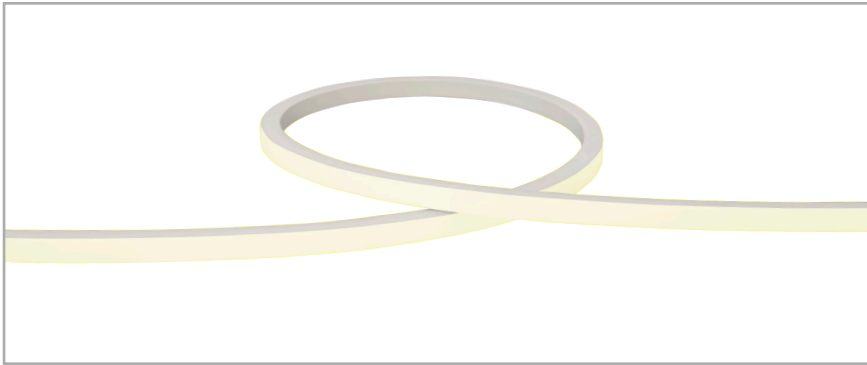

DESCRIPTION

Create dramatic accents

Dome profile with 270° beam angle, square profile 160° beam angle

Top bend and side bend options available

Weather safe material provides protection and durability

TECHNICAL INFORMATION

PART NUMBER	LED-NXX-XX
PROFILE*	Dome, Square
WATTAGE*	3.7W/ft
IP RATING*	IP67 wet & IP68 wet
CCT / COLOR*	2200K - 5200K
INPUT VOLT-AGE*	24V DC, 120V AC
OUTPUT*	104 to 282 lm/ft
SEGMENT LENGTH*	Varies depending on model
MATERIAL*	Silicone or PVC
MOUNTING	Mounting clips recommended
POWER SUPPLY*	24V models require a remote power supply

**Refer to website for specific model information*




EXTERIOR ACCENT

As shown: LED-L3.7W-67-SSS-27K-24V



LED NEON COLOR

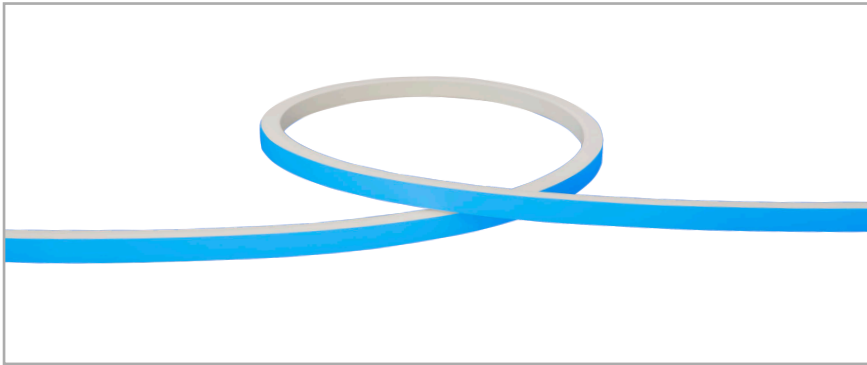

DESCRIPTION

Create dramatic interior or exterior accents with a clean line of color

Brilliant uniformity (no imaging)


Color changing controls available


Weather safe material provides protection and durability

TECHNICAL INFORMATION

PART NUMBER	LED-NXX-XX
PROFILE	Dome, Square
WATTAGE*	3.7Wft to 5.3W/ft
IP RATING*	IP67 wet, IP68 wet
CCT / COLOR*	RGB, RGBW, Static Color
INPUT VOLTAGE	24V DC
OUTPUT	104 to 148 lm/ft
SEGMENT* LENGTH	Varies depending on model
MATERIAL*	Silicone or PVC
MOUNTING	Mounting clips recommended
POWER SUPPLY	Requires a 24V power supply


**Refer to website for specific model information*

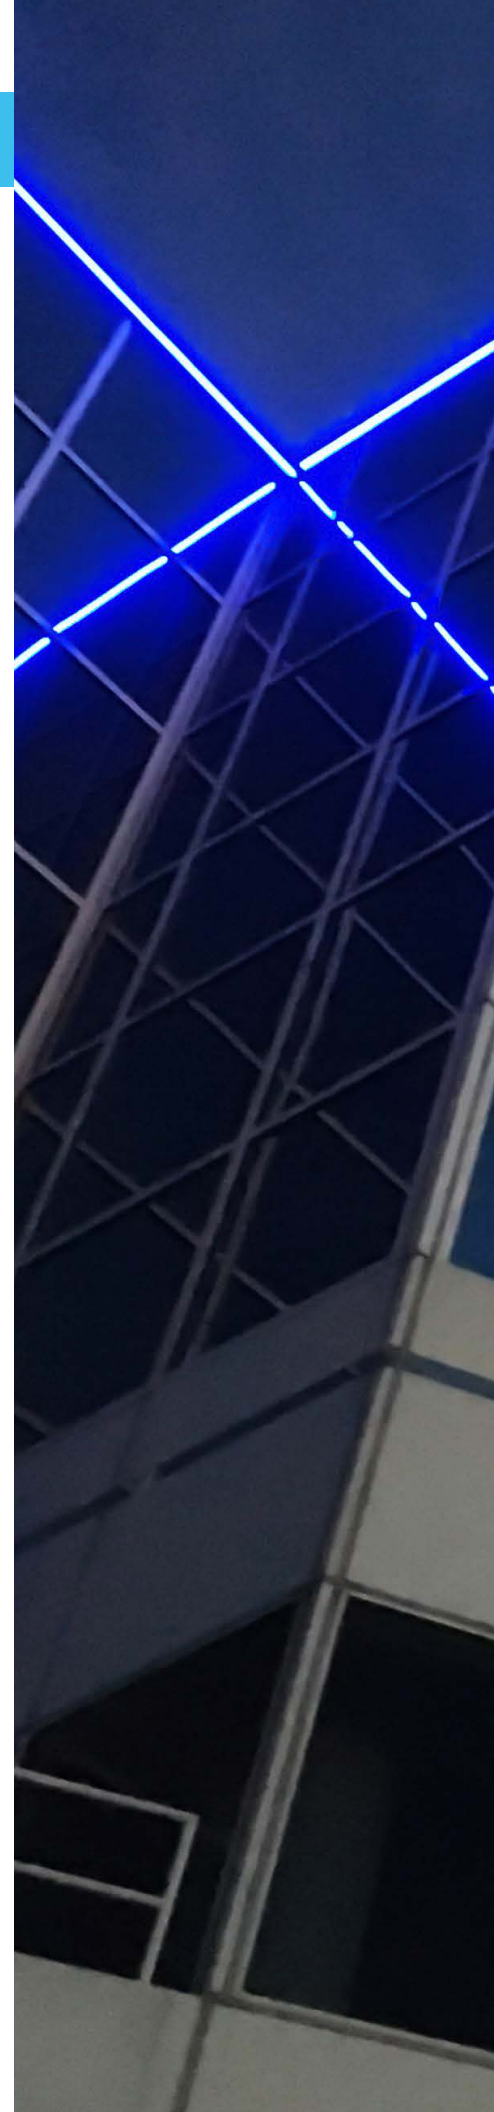

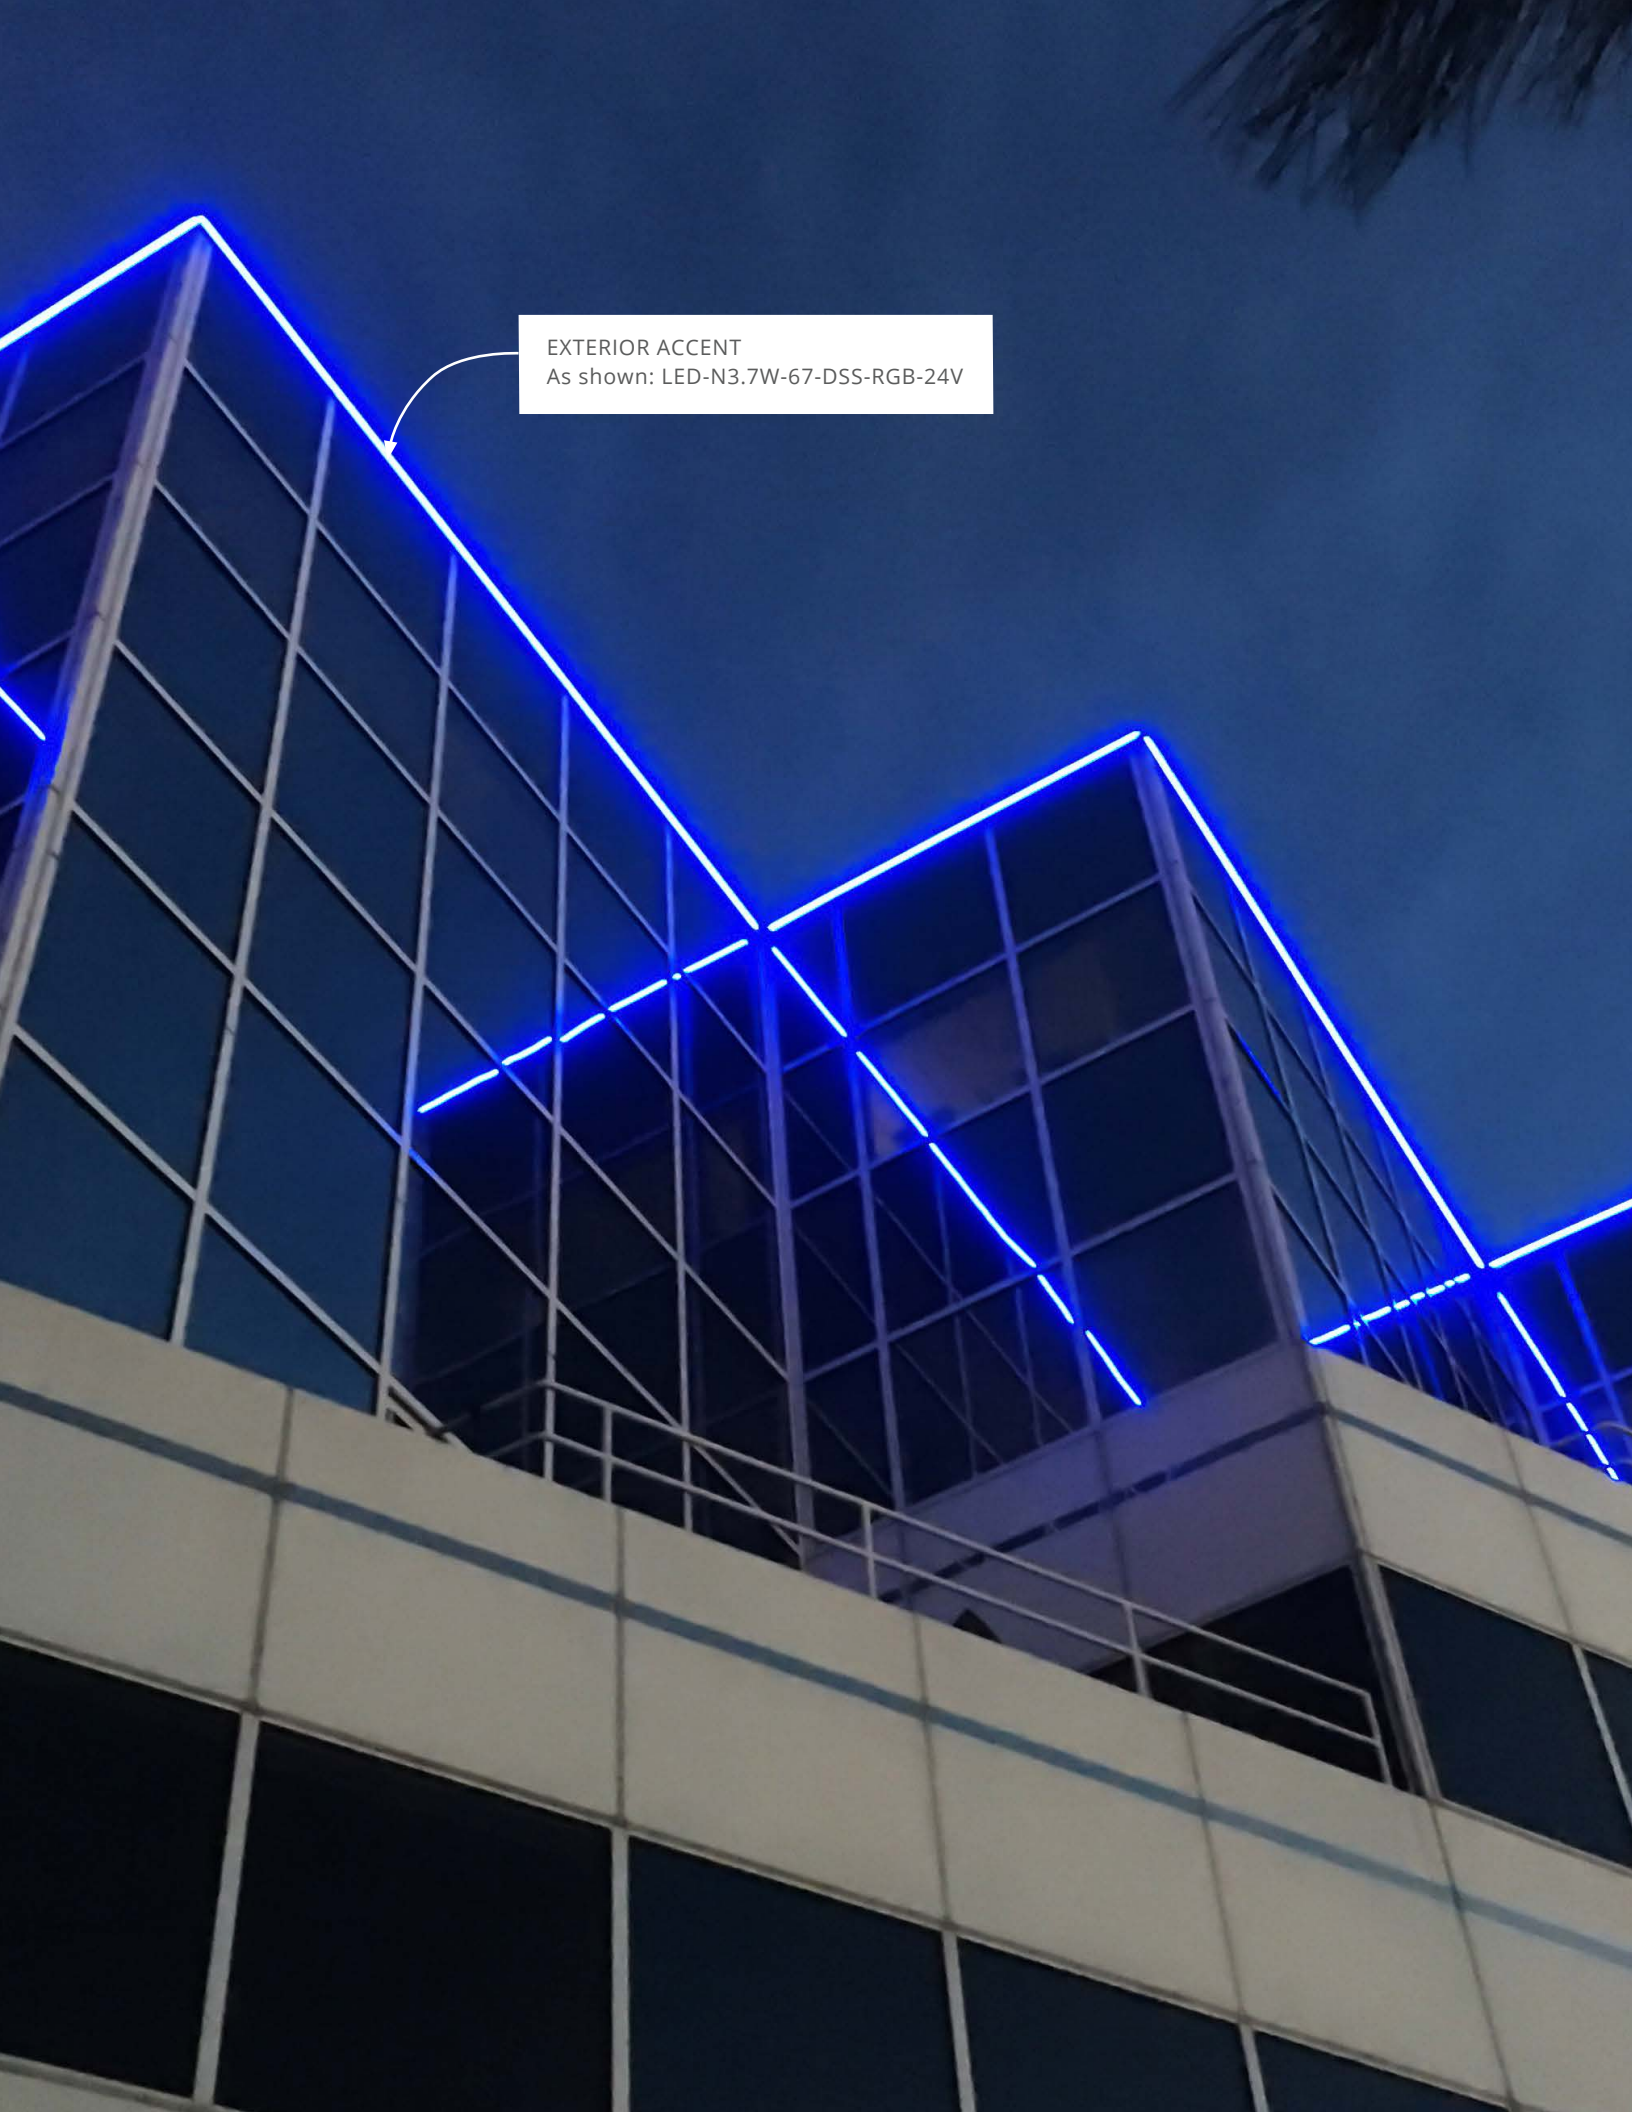

EXTERIOR ACCENT
As shown: LED-N3.7W-67-DSS-RGB-24V

LED NEON ADDRESSABLE

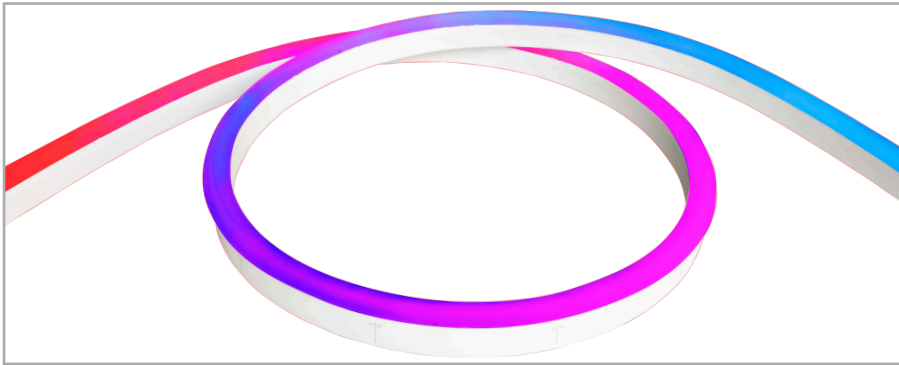

DESCRIPTION


Digitally addressable lighting creates color-changing illumination
Brilliant uniformity (no imaging) that delivers a clean line of colored light
Top bend (square profile only) and side bend options available
Create your own lighting effects and patterns in LED neon
Complete suite of controls available
Weather safe material provides protection and durability

TECHNICAL INFORMATION

PART NUMBER	LED-NDXX-XX
PROFILE	Dome, Square
WATTAGE*	4.6Wft to 6.7W/ft
IP RATING*	IP67 wet, IP68 wet
CCT / COLOR*	Static White, Tunable White, RGB & RGBW
INPUT VOLTAGE	24V DC
OUTPUT	6 to 73lm/ft
SEGMENT* LENGTH	Varies depending on model
MATERIAL*	Silicone or PVC
MOUNTING	Mounting clips recommended
POWER SUPPLY	Requires a 24V power supply

**Refer to website for specific model information*



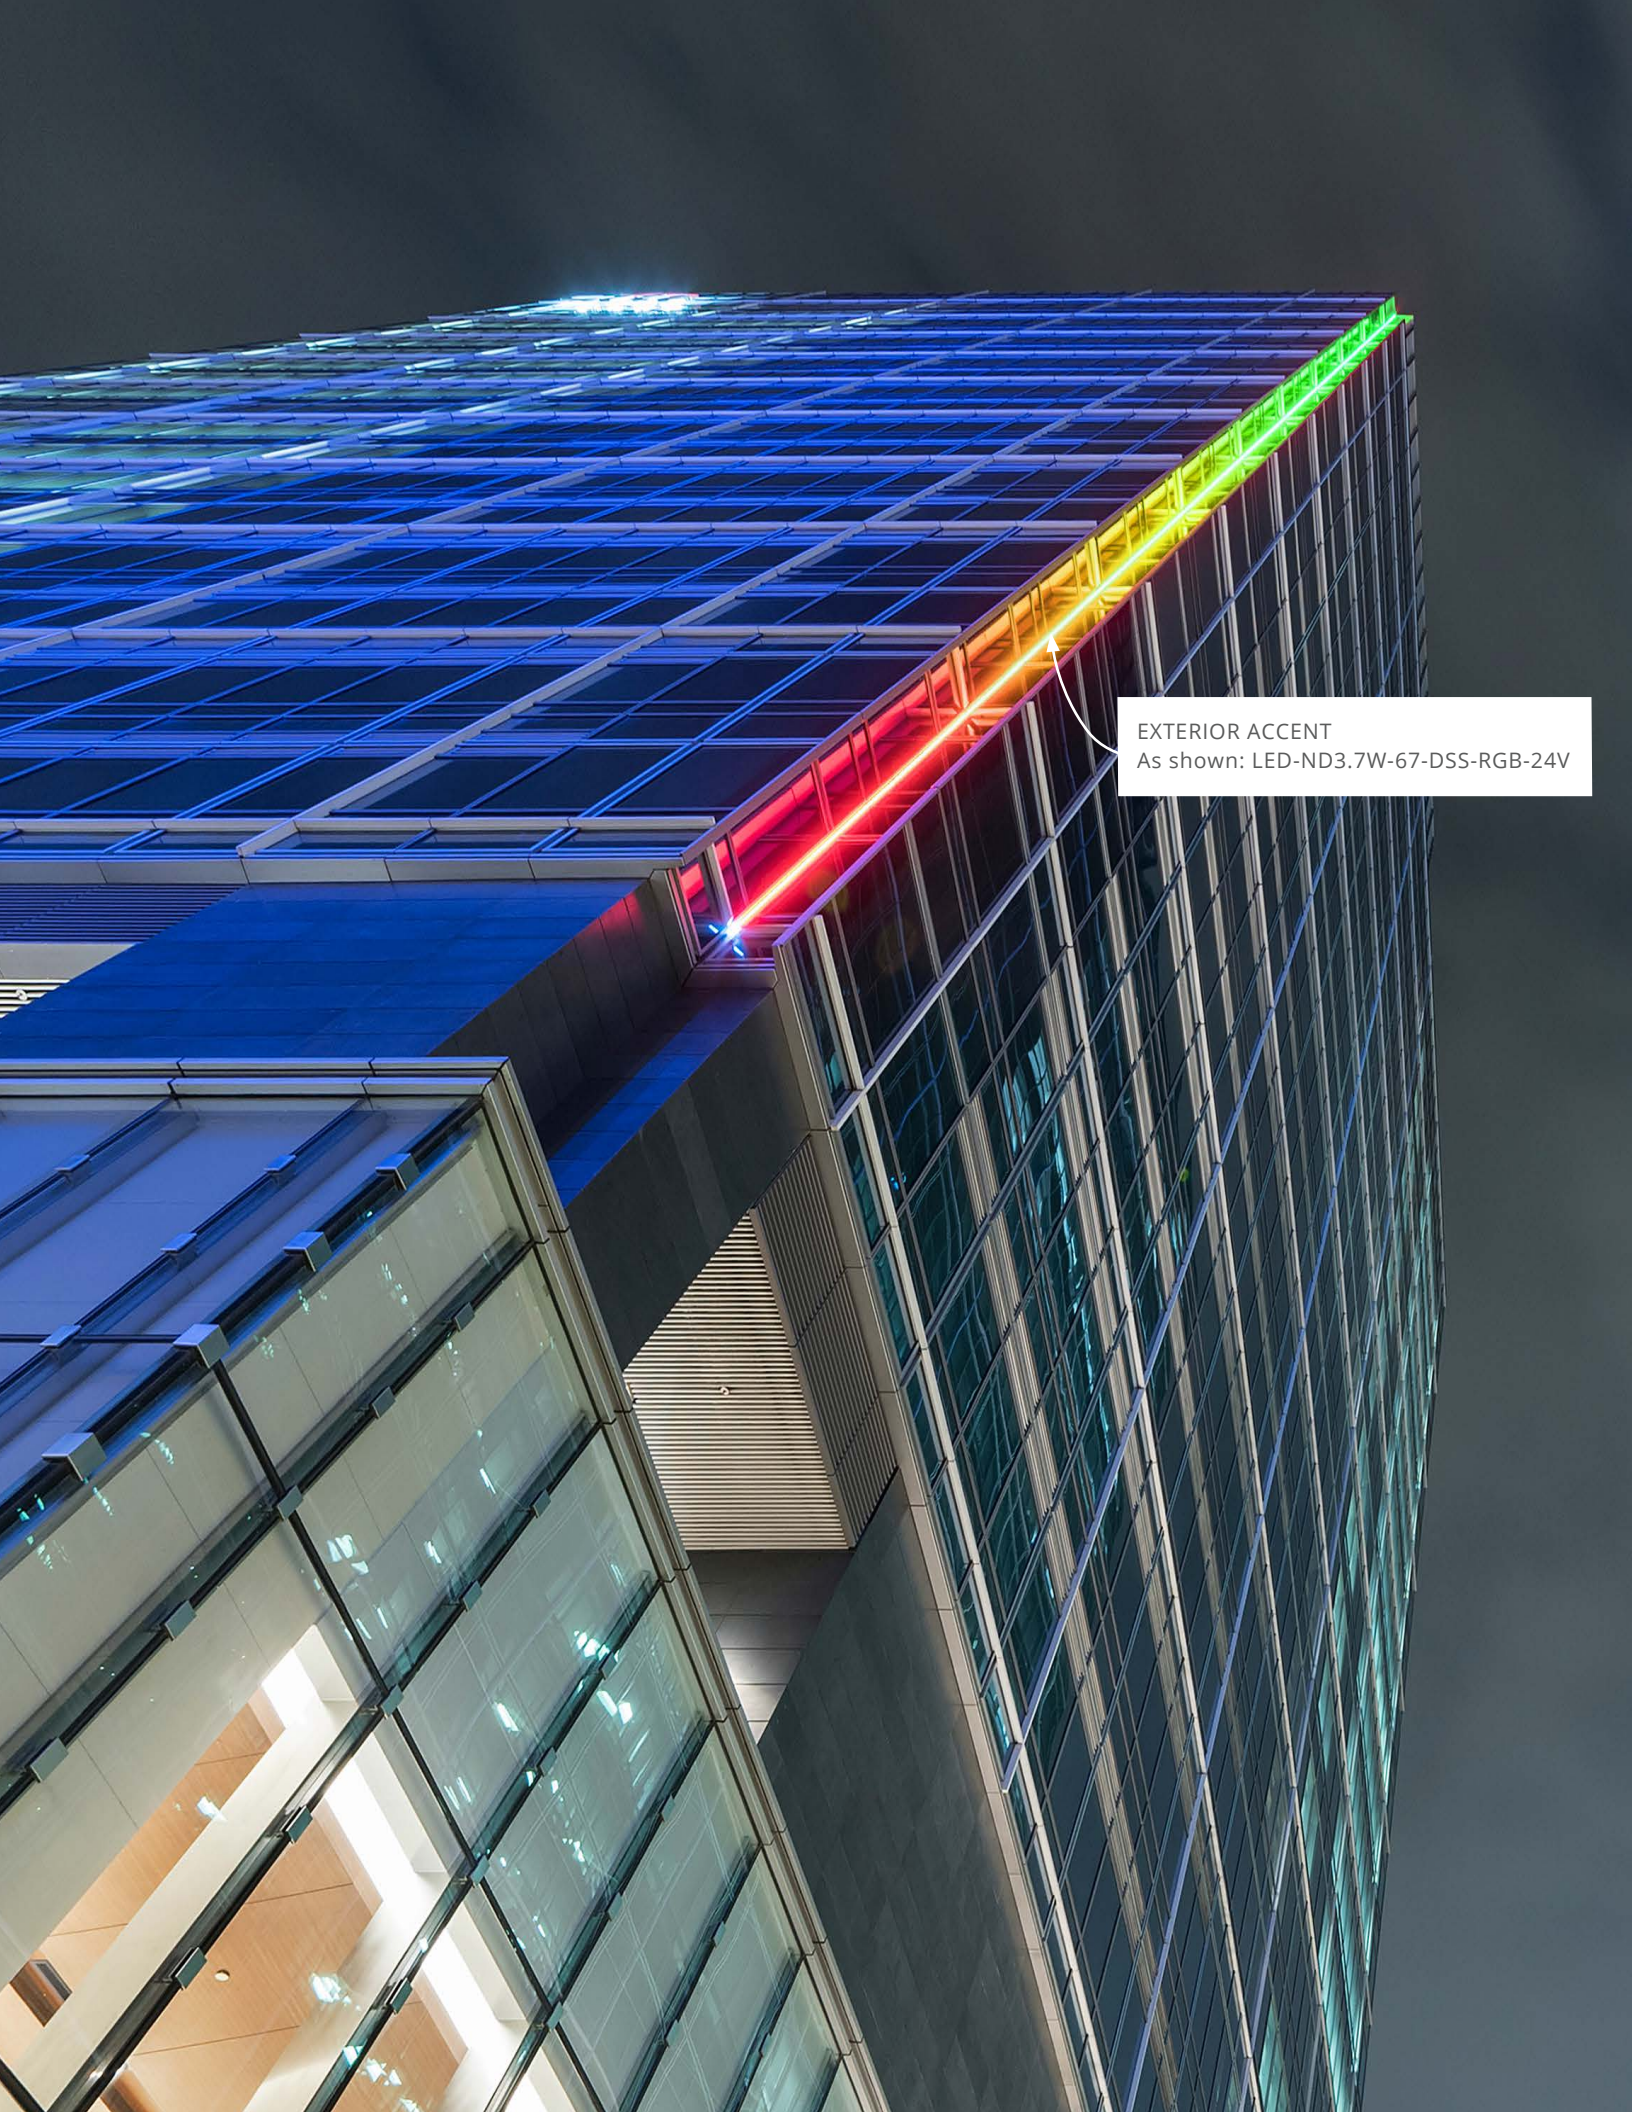

EXTERIOR ACCENT
As shown: LED-ND3.7W-67-DSS-RGB-24V

OUTDOOR WASHER GRAZER



DESCRIPTION

Highlight exterior or interior architectural features

Different beam angles to graze or wash a surface

Interconnect up to (3) 50W units or (6) 25W units

Plug and play connectors, makes it easy to interconnect


Adjustable mounting brackets rotate up to 180°

TECHNICAL INFORMATION

PART NUMBER	LED-OWG-XX
FINISH	Black powder coat
LENS MATERIAL	Clear Tempered glass
WATTAGE*	25W or 50W
IP RATING	IP66 wet
CCT / COLOR*	2700K - 5200K; RGBW
BEAM ANGLE*	15°, 25°, 30°, 40°, 60°, 10x30°, 10x45°, 10x70°, 20x60°,
INPUT VOLTAGE	24V DC
LENGTH*	20IN or 39IN
OUTPUT*	2250 to 5200 lm/ft
MOUNTING	Adjustable locking bracket
POWER SUPPLY	Requires a 24V power supply

**Refer to website for specific model information*



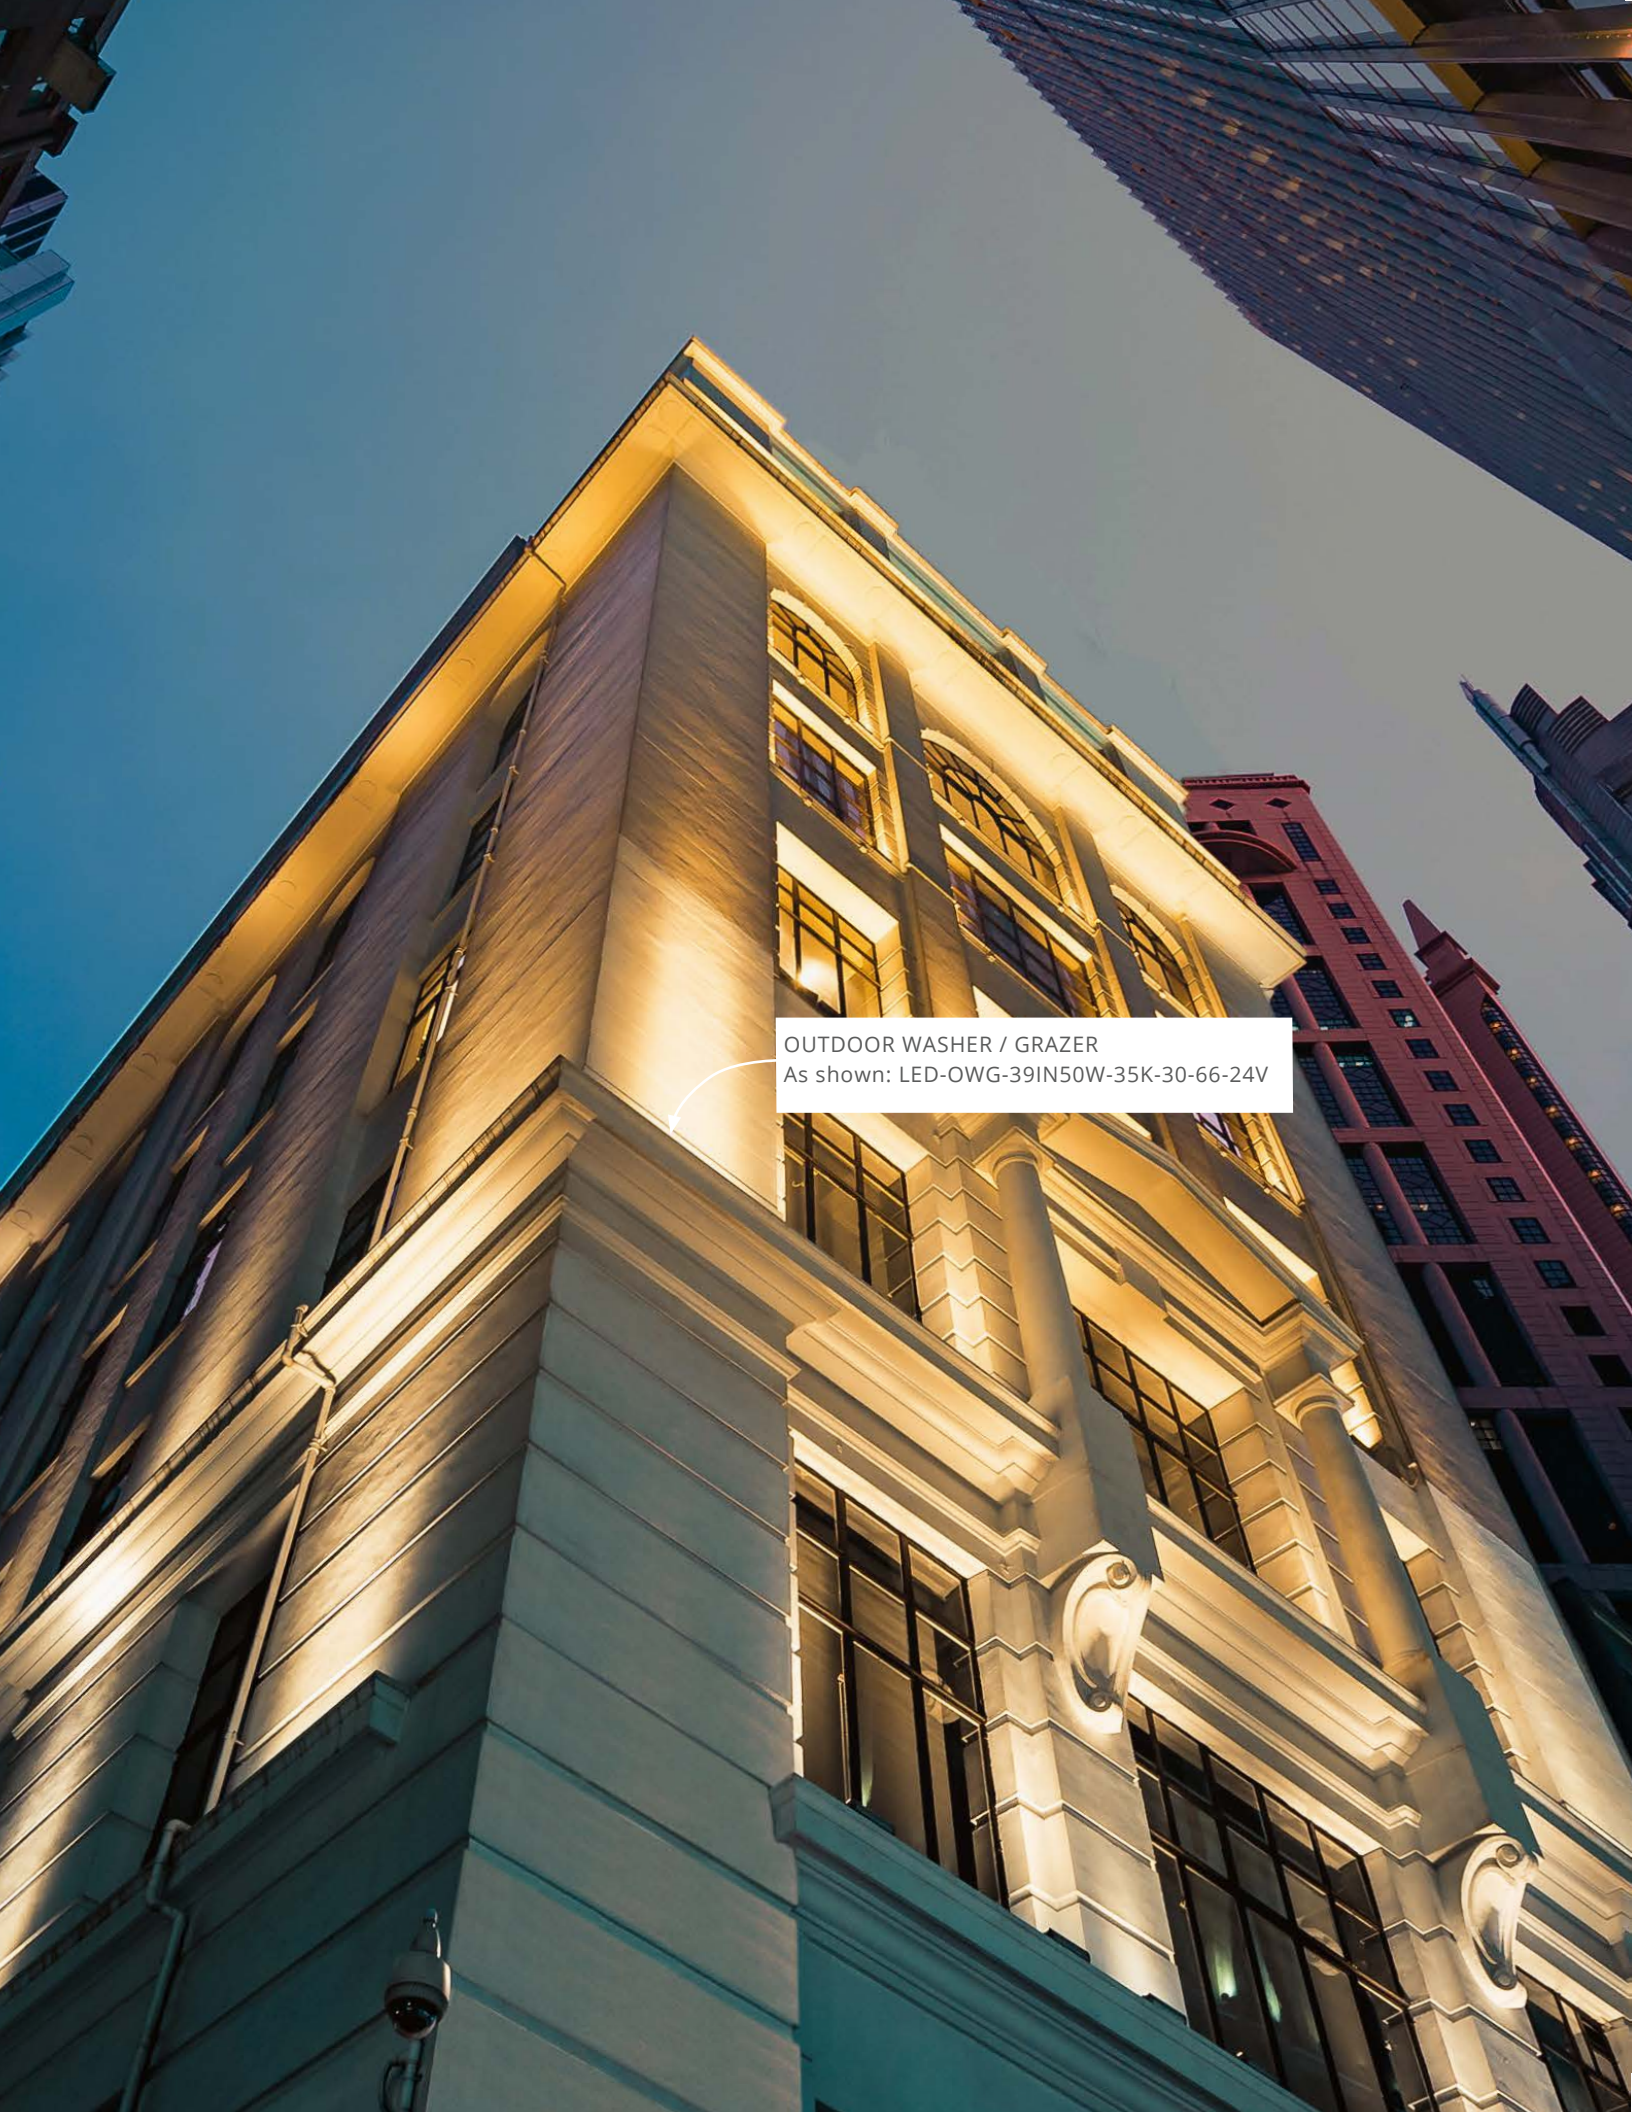

OUTDOOR WASHER / GRAZER

As shown: LED-OWG-39IN50W-35K-30-66-24V

T-GRID 1" DROP CEILING FIXTURE



DESCRIPTION

Slim, convenient, and elegant lighting solution

Upgrade from old 2ft x 4ft fixtures to an architectural linear

Look without reconstructing your ceiling

Compatible with 9/16" and 15/16" suspended grid ceilings

Easy to install w/ rotary buckle (no drilling)

TECHNICAL INFORMATION

PART NUMBER	LED-TG1-XX
FINISH	White powder coat
LENS	Frosted, Black louver, Microprism, Asymmetric, Double Asymmetric, Block lens
WATTAGE*	12.0W or 24.0W
IP RATING	IP20 dry
CCT*	3000K, 3500K, 4000K
BEAM ANGLE*	Varies by Lens Type
INPUT VOLTAGE	24V DC
LENGTH	24IN or 48IN
OUTPUT	615 to 2060 lm/ft
LEDs	Osram single binned LEDs +/- 30-70 CCT, MacAdam 3 SDCM
MOUNTING	Integrated mounting clips, compatible with 9/16" & 15/16" T-Grid suspended ceilings/drop ceilings
POWER SUPPLY	Requires a 24V power supply


**Refer to website for specific model information*





AMBIENT / ACCENT LIGHTING
As shown: LED-TG1-48IN24W-35K-M-20-24V

LED FLEX SHEET, 24V

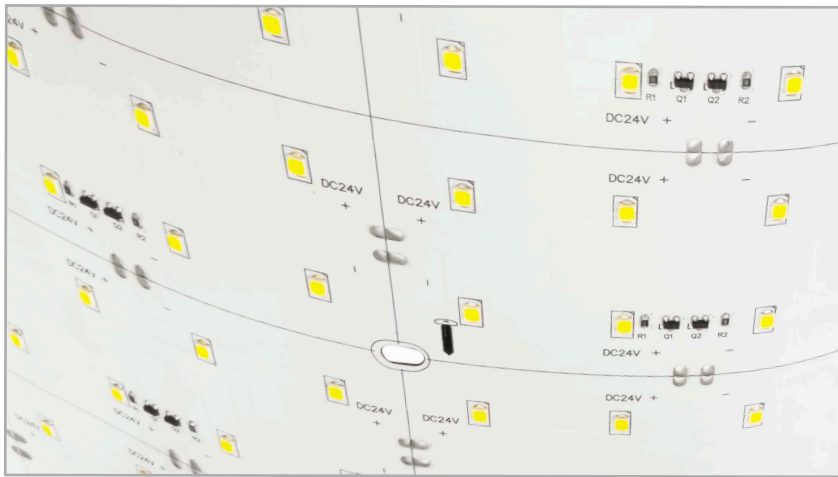

DESCRIPTION

Flexible sheet of light for smooth illumination of any surface

Tighter diode spacing than traditional LED sign modules


White, RGB(W), and Variable White sheets available

Secure with adhesive or screw-in mounting methods

TECHNICAL INFORMATION

PART NUMBER	LED-FSXX-XX
WATTAGE*	5.0W/ft to 46.0W/ft
IP RATING*	IP20 dry, IP54 wet, IP64 wet,
CCT / COLOR*	2200K - 5000K; RGB; RGBW; tunable white
INPUT VOLTAGE	24V DC
OUTPUT*	75 to 2200 lm/ft
OPERATING TEMP.	-13°F to 140°F
CRI*	80+ to 90+
ADHESIVE BACKING	3M™ mounting adhesive tape
LIFESPAN	50,000 hrs
POWER SUPPLY	Requires a 24V power supply

**Refer to website for specific model information*

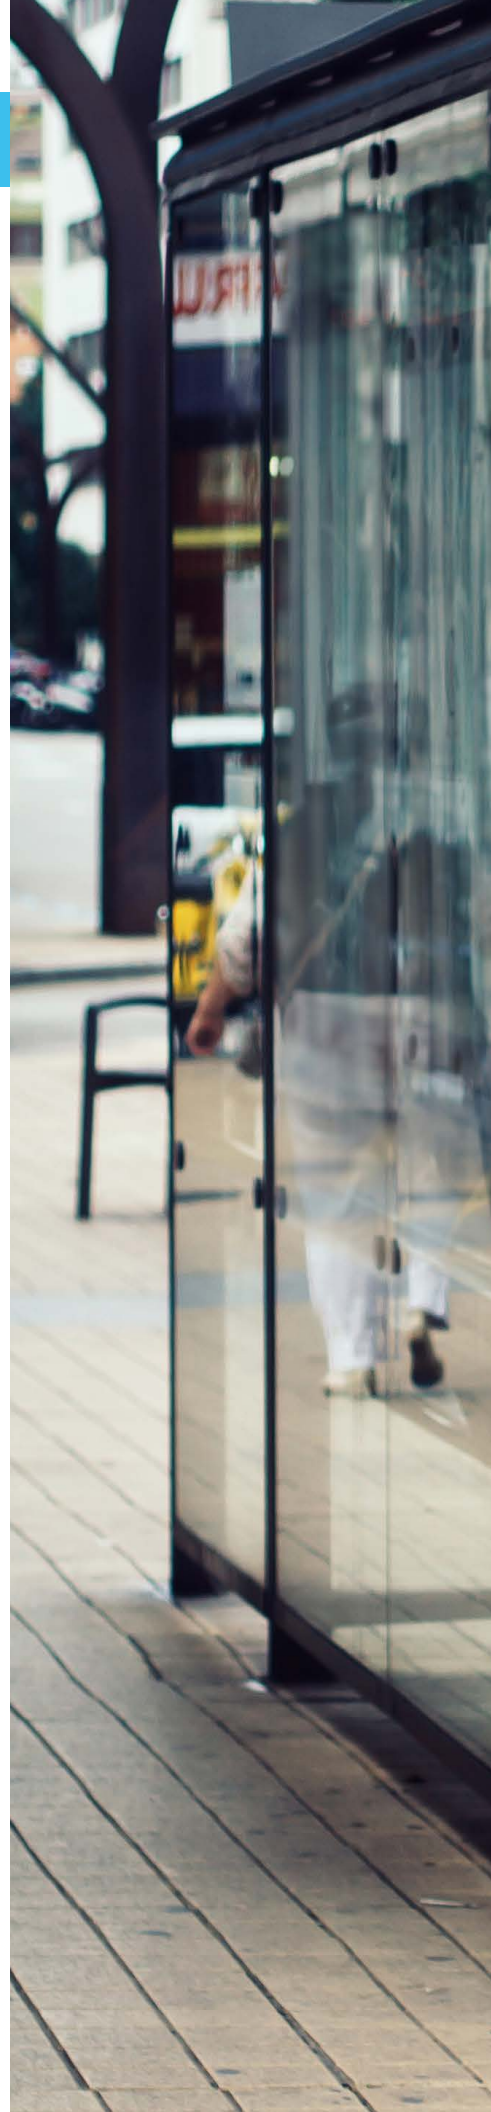


SIGNAGE BACKLIGHTING
As shown: LED-FS26.0W-20-30K-24V-90



BLUE SHIRT
\$14,99

Super
SALE
UP TO
50%
OFF

STATIC WHITE LED TAPELIGHT

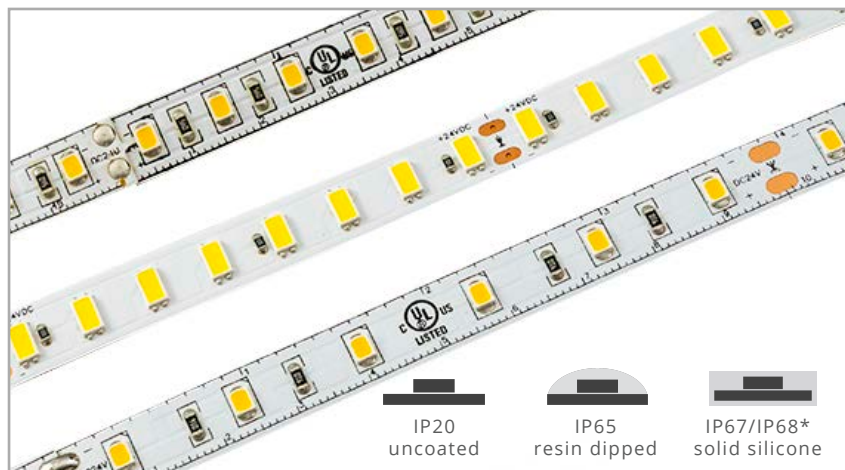

DESCRIPTION

Single bin LEDs to provide color consistency

Soldered connections for optimal quality and performance

Assembled and shipped from Chicago to provide peace of mind

TECHNICAL INFORMATION

PART NUMBER*	LED-LXXW-XX
WATTAGE*	1.5W/ft to 8.8W/ft
IP RATING *	IP20 dry, IP65 wet, IP67 wet, IP68 wet
CCT / COLOR	2200K - 6500K
INPUT VOLTAGE	24V DC
OUTPUT*	145 to 1068 lm/ft
OPERATING TEMP.	-13°F to 140°F
CRI	90+
ADHESIVE BACKING	VHB
LIFESPAN	50,000 hrs
POWER SUPPLY	Requires a 24V power supply

**Refer to website for specific model information*






ACCENT LIGHTING

As shown: LED-L4.4W-65-40K-24V-90

RGB/W LED TAPELIGHT

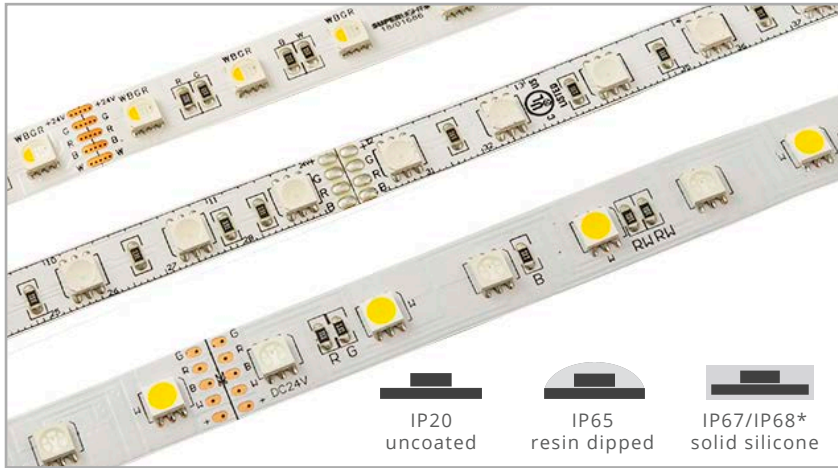

DESCRIPTION

Up to 255 colors to add dimension, visual interest

Cut to any length for perfect custom fit

Soldered connections for optimal quality and performance

Assembled and shipped from Chicago to provide peace of mind

TECHNICAL INFORMATION

PART NUMBER*	LED-LXXW-XX
WATTAGE*	4.4W/ft to 8.8W/ft
IP RATING *	IP20 dry, IP65 wet, IP67 wet, IP68 wet
CCT / COLOR	RGB; RGBW
INPUT VOLTAGE	24V DC
OUTPUT*	119 to 790 lm/ft
OPERATING TEMP.	-13°F to 140°F
CRI	90+
ADHESIVE BACKING	VHB
LIFESPAN	50,000 hrs
POWER SUPPLY	Requires a 24V power supply

**Refer to website for specific model information*





ACCENT LIGHTING
As shown: LED-LCC4.4W-20-RGB-24V

120V STATIC WHITE LED TAPELIGHT



DESCRIPTION

Maximum length of >150ft for long runs of lighting

No driver/power supply required; lay, plug and light


Soldered connections for optimal quality and performance

Assembled and shipped from Chicago to provide peace of mind

TECHNICAL INFORMATION

PART NUMBER	LED-LACXX-XX
WATTAGE*	2.5W/ft & 4.0W/ft
IP RATING *	IP65 wet
CCT / COLOR	2200K - 5200K
INPUT VOLTAGE	120V AC
OUTPUT*	145 to 380 lm/ft
OPERATING TEMP.	-13°F to 140°F
CRI	80+ / 90+
ADHESIVE BACKING	Mounting Clip or Extrusion
LIFESPAN	50,000 hrs
POWER SUPPLY	Not Required

**Refer to website for specific model information*

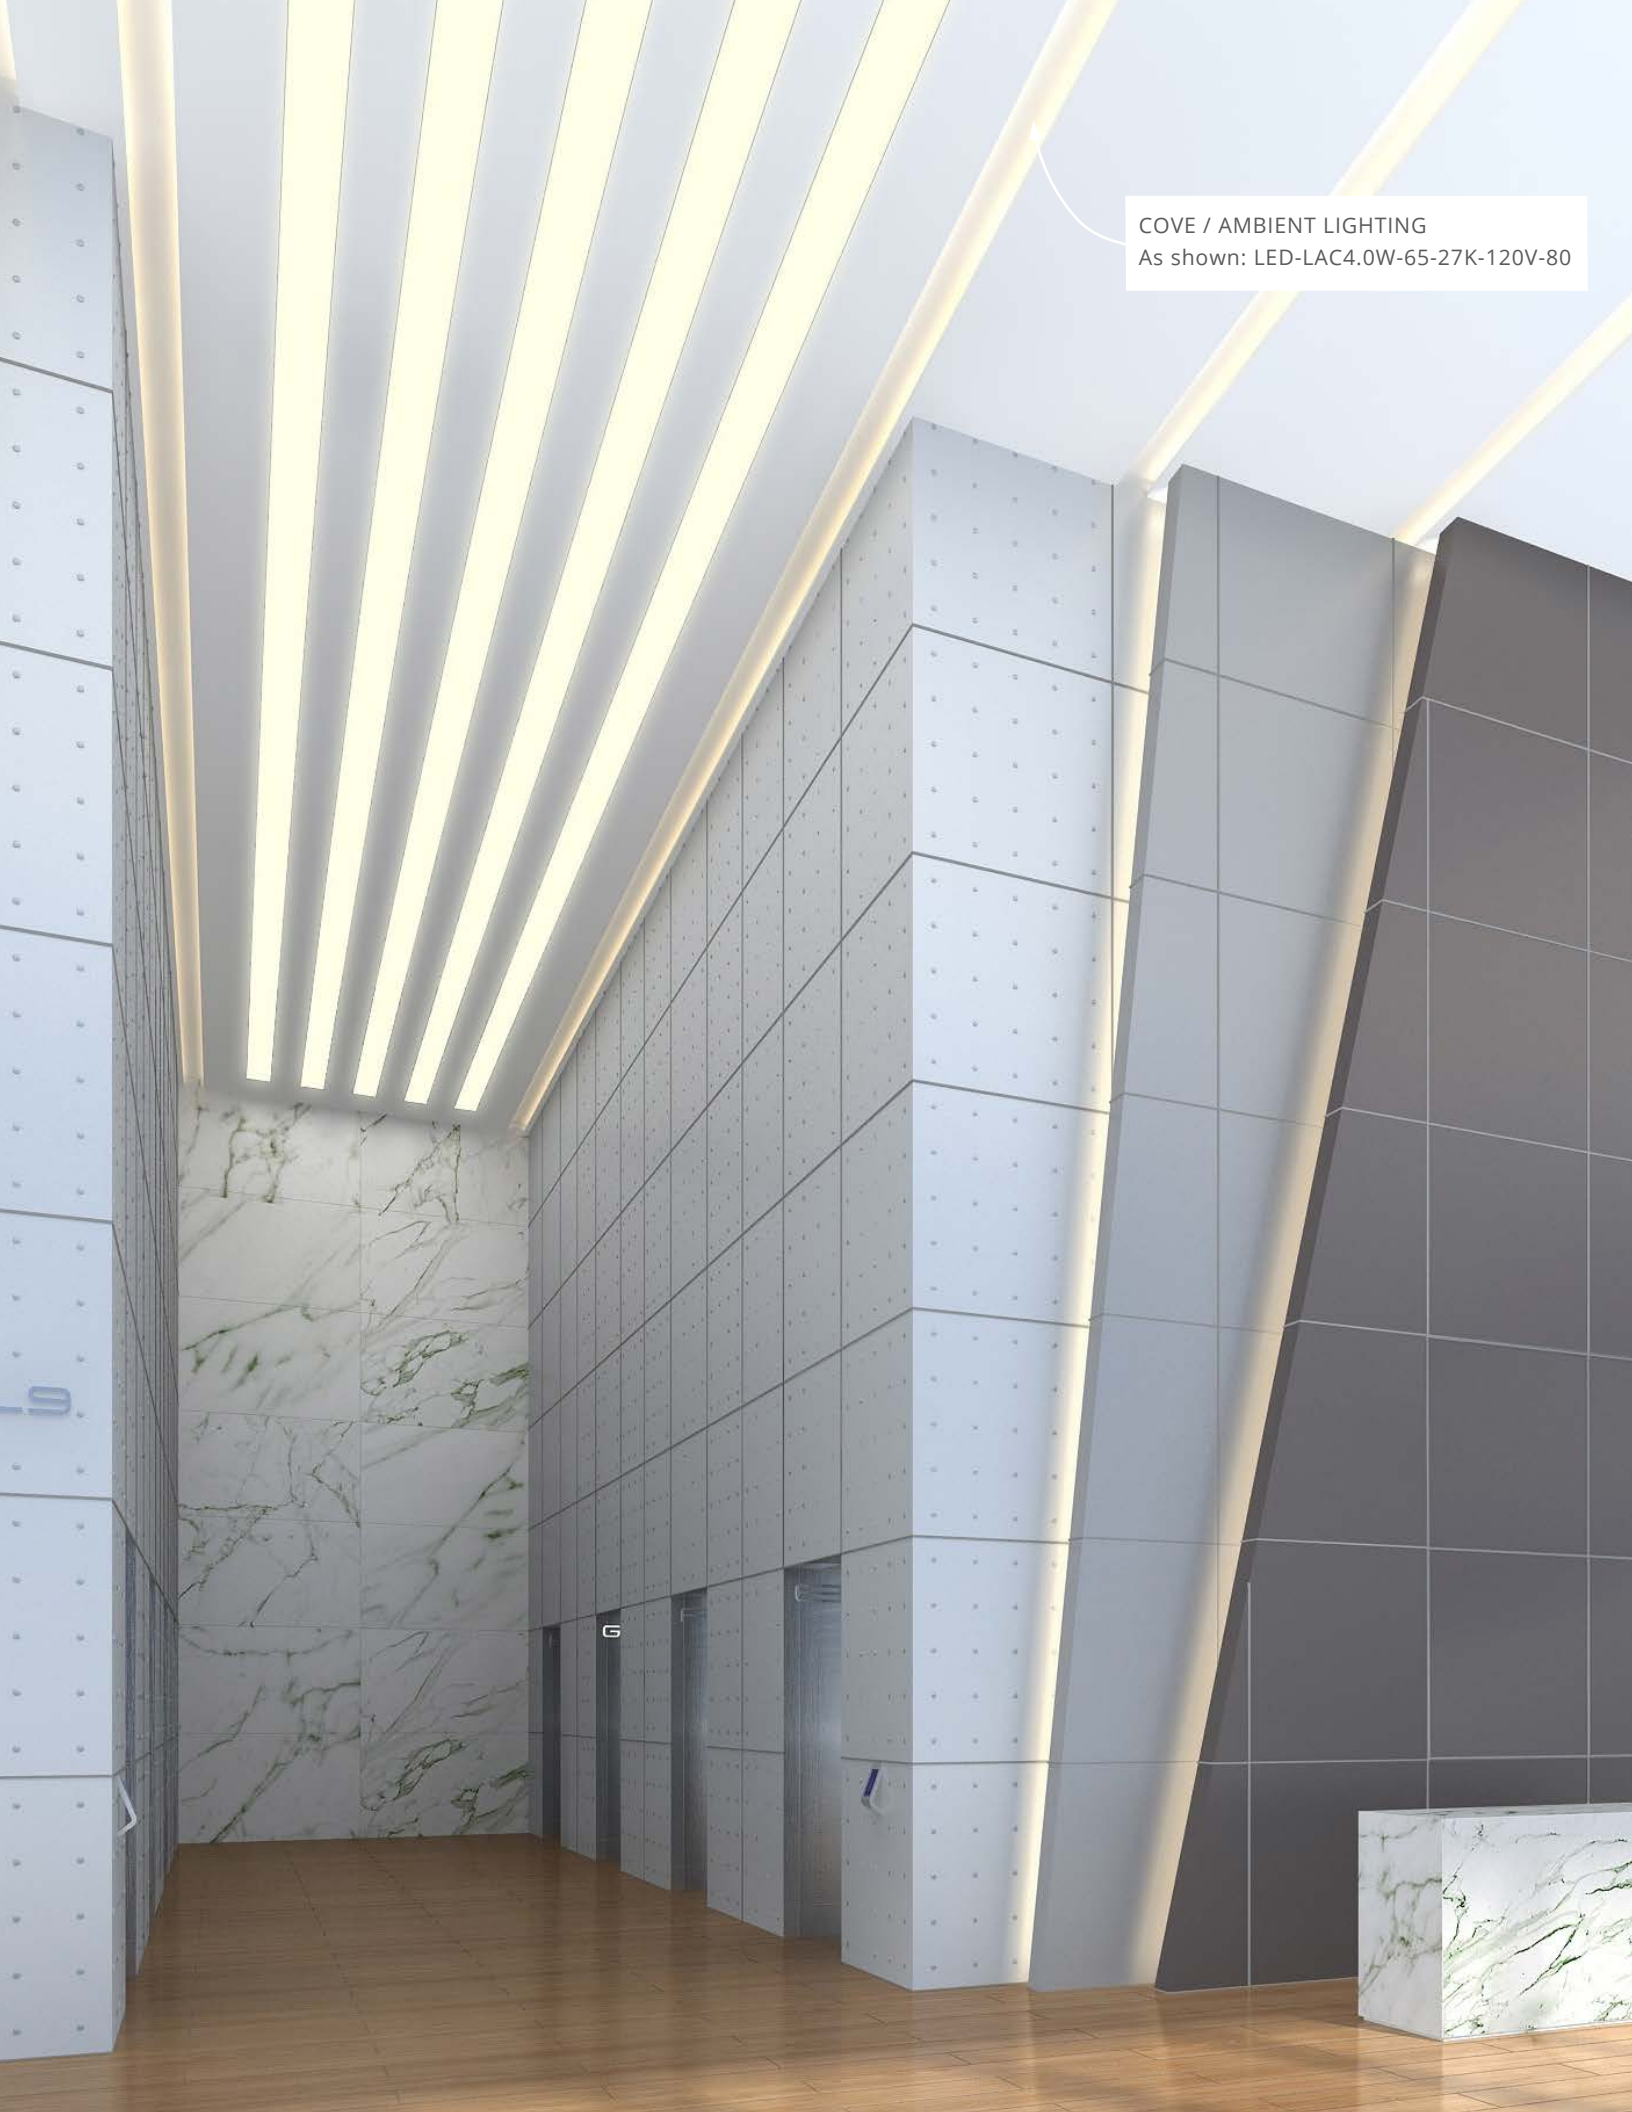

COVE / AMBIENT LIGHTING
As shown: LED-LAC4.0W-65-27K-120V-80

COB LED TAPELIGHT



DESCRIPTION

Provides uniform illumination with no diode imaging in low profile extrusions

Great selection for use with a range of low profile extrusions

Multiple solder-less connector options available

TECHNICAL INFORMATION

PART NUMBER	LED-LCOB4.6W-XX
WATTAGE	4.6 W/ft
IP RATING	IP20 dry
CCT / COLOR	2700K - 6500K
INPUT VOLTAGE	24V DC
OUTPUT*	380 to 412 lm/ft
OPERATING TEMP.	-13°F to 140°F
CRI	90+
ADHESIVE BACKING	VHB
LIFESPAN	50,000 hrs
POWER SUPPLY	Requires a 24V power supply



ACCENT LIGHTING
As shown: LED-LCOB4.6W-20-30K-24V-90



WARM FADE LED TAPELIGHT



DESCRIPTION

Replicates the dimming effect of an incandescent dimmer

Color temperature gets warmer as it dims

Pair this Tapelight with the Deep extrusion for minimal diode imaging

TECHNICAL INFORMATION

PART NUMBER	LED-LWF3.5W-XX
WATTAGE	3.5W/ft
IP RATING *	IP20 dry, IP67 wet
CCT / COLOR*	1800K - 2700K & 1800K - 3000K
INPUT VOLTAGE	24V DC
OUTPUT*	295 to 304 lm/ft
OPERATING TEMP.	-13°F to 140°F
CRI	90+
ADHESIVE BACKING	VHB
LIFESPAN	50,000 hrs
POWER SUPPLY*	Requires a 24V power supply

**Refer to website for specific model information*





COVE WALL WASH
As shown: LED-LWF3.5W-20-27D-24V

TUNABLE WHITE LED TAPELIGHT



DESCRIPTION

Adjust LED tapelight to any CCT desired in a space


No imaging with certain extrusions, recommended to be used with Deep extrusion

Tunable controls & modules available to complete system

TECHNICAL INFORMATION


PART NUMBER	LED-LTWXX-XX
WATTAGE*	2.7W/ft to 5.3W/ft
IP RATING *	IP20 dry, IP65 wet, IP68 wet
CCT / COLOR*	1800K -3500K & 2700K - 5200K
INPUT VOLTAGE	24V DC
OUTPUT*	163 to 549 lm/ft
OPERATING TEMP.	-13°F to 140°F
CRI	90+
ADHESIVE BACKING	VHB
LIFESPAN	50,000 hrs
POWER SUPPLY	Requires a 24V power supply

**Refer to website for specific model information*

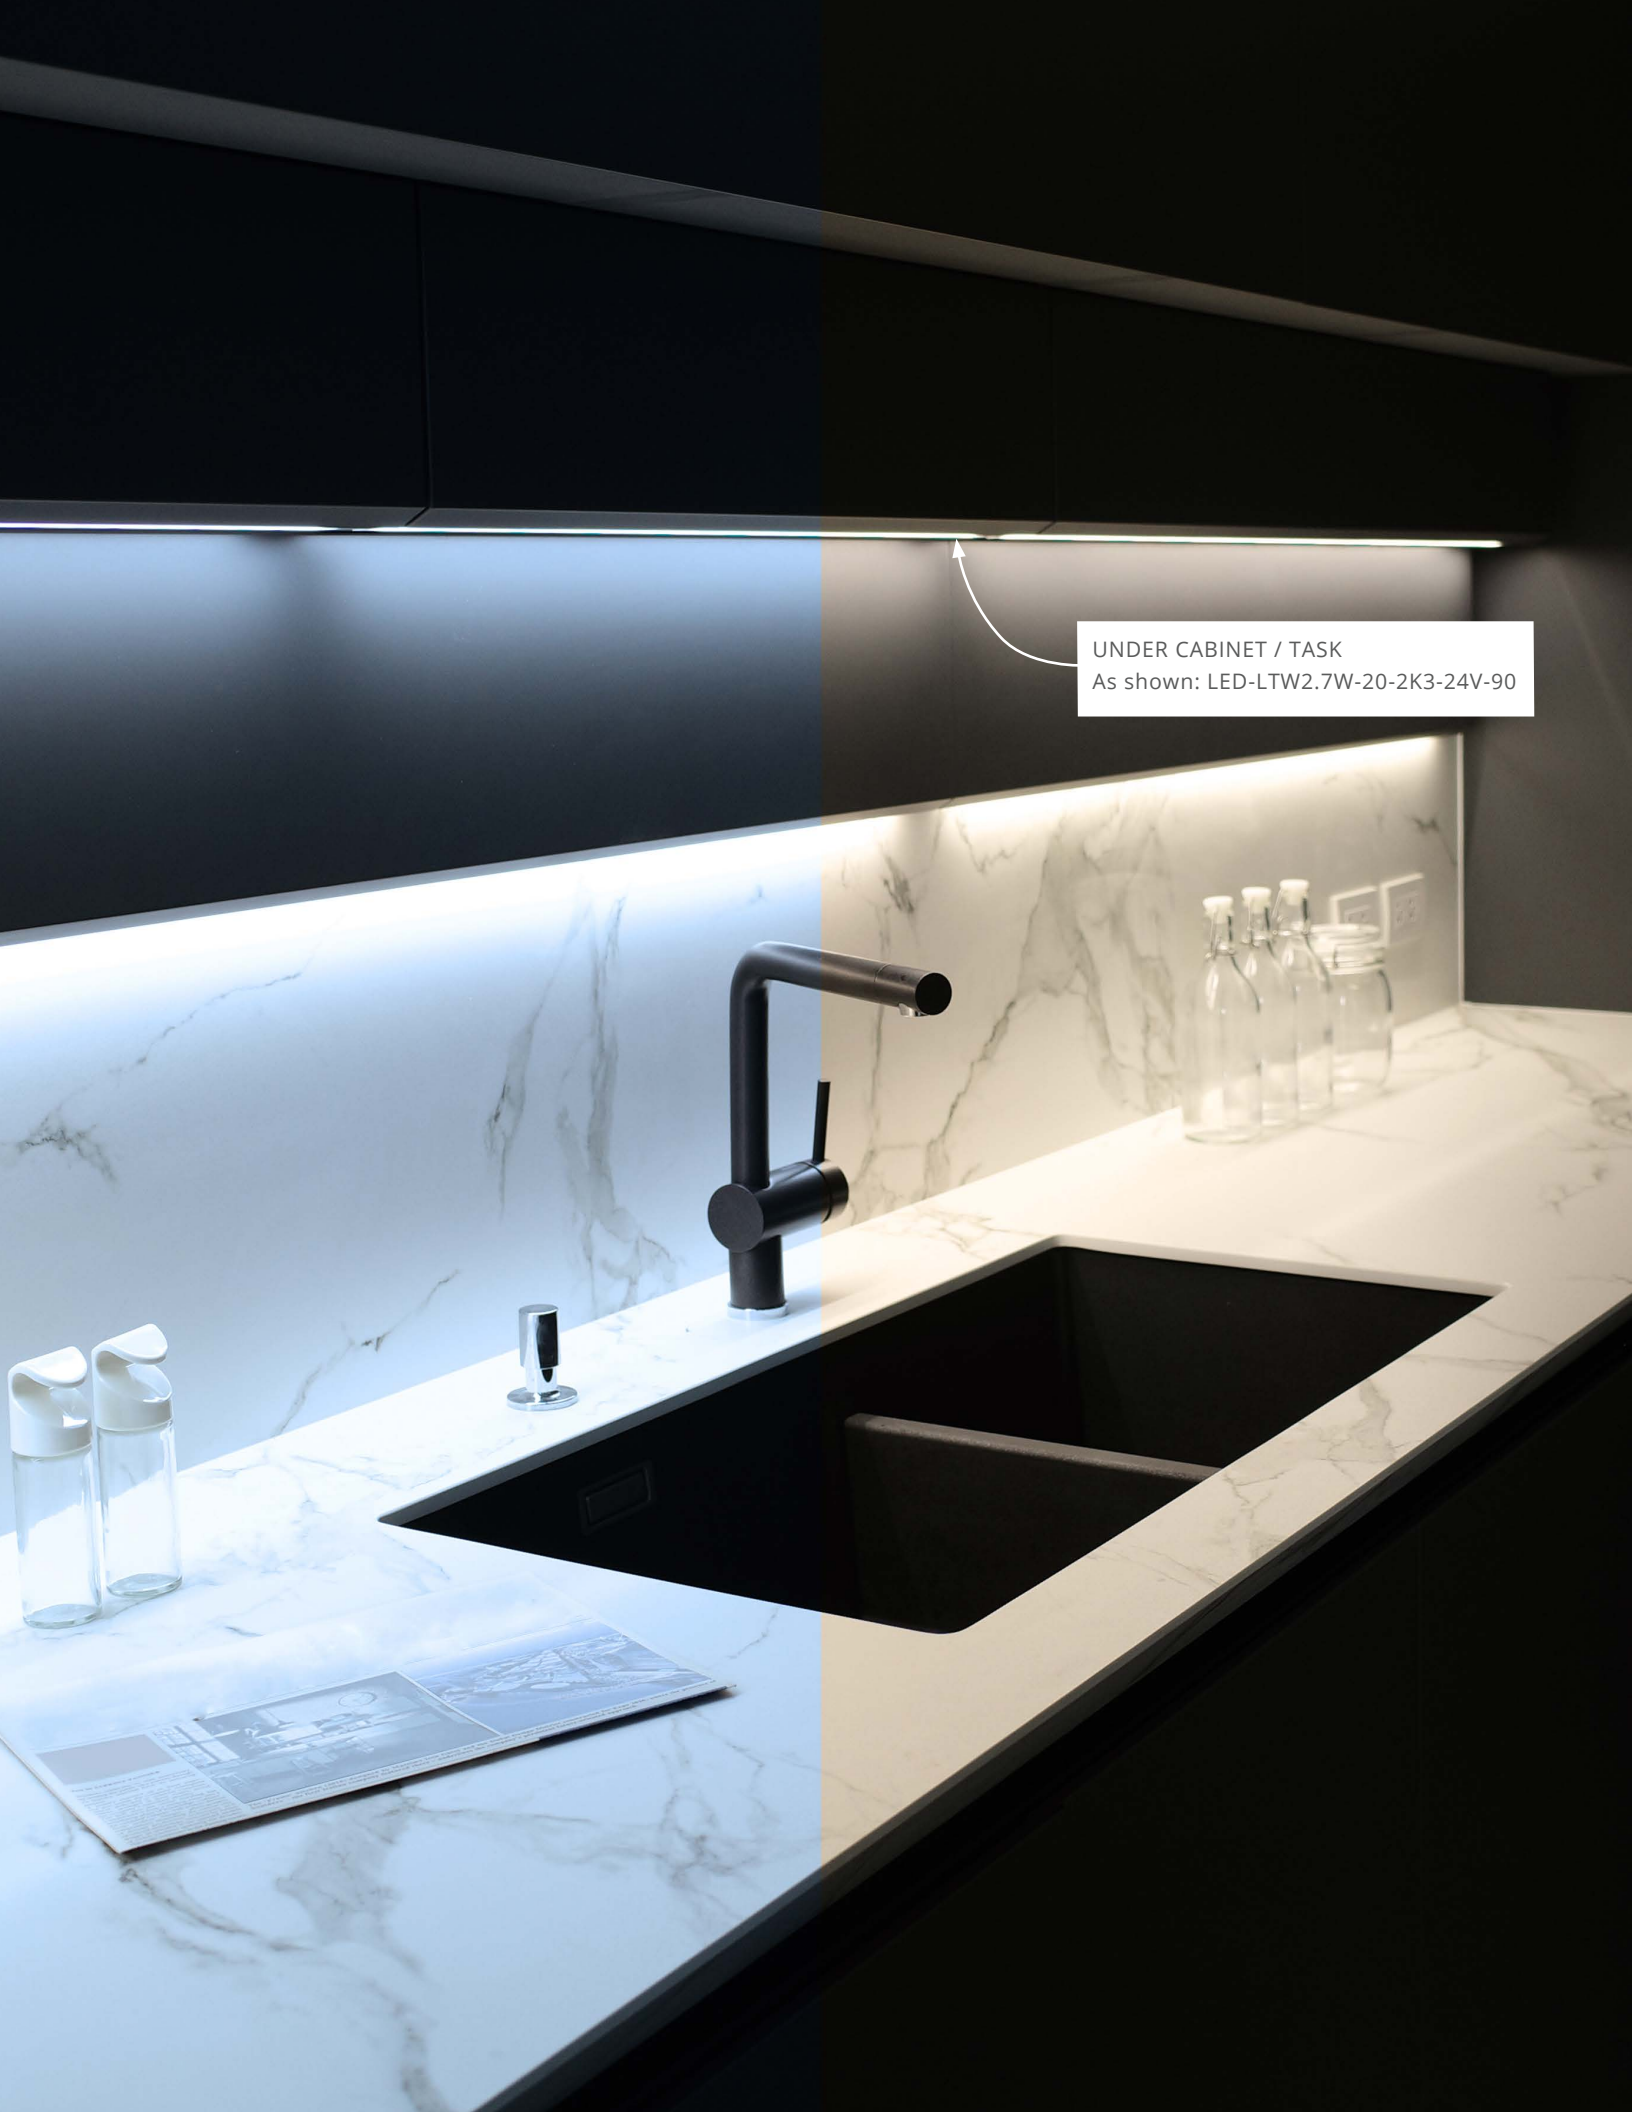

UNDER CABINET / TASK
As shown: LED-LTW2.7W-20-2K3-24V-90

S-FLEX LED TAPELIGHT 24V

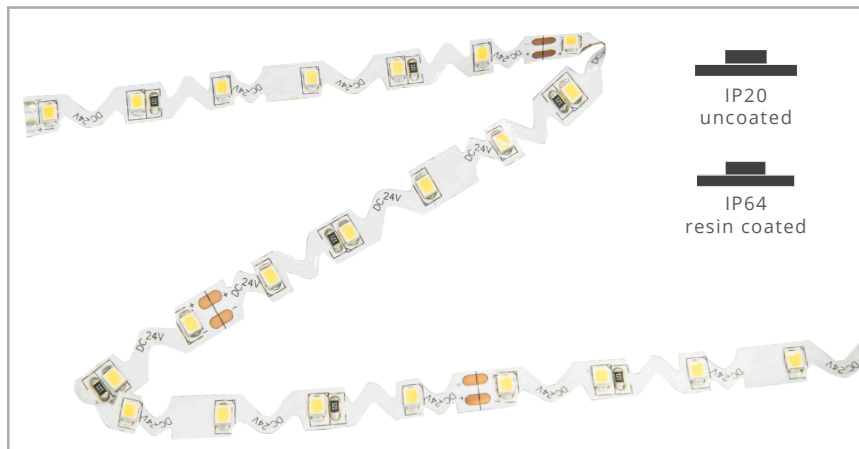

DESCRIPTION

S-Flex pivots 360° to create designs not possible with standard tape

Cut to length for perfect custom fit

Soldered connections for optimal quality and performance

Assembled and shipped from Chicago to provide peace of mind

TECHNICAL INFORMATION













PART NUMBER	LED-LSF1.8W
WATTAGE	1.8/ft
IP RATING	IP20 dry & IP64 wet
CCT / COLOR	2200K - 5200K
INPUT VOLTAGE	24V DC
OUTPUT	199 to 227 lm/ft
OPERATING TEMP.	-13°F to 140°F
CRI	80+
ADHESIVE BACKING	VHB
LIFESPAN	50,000 hrs
POWER SUPPLY	Requires a 24V power supply



SIGNAGE

As shown: LED-LSF1.8W-20-35K-24V-80

EXTRUSION + LED COMPATIBILITY / IMAGING CHART*

Part Numbers	Profile Dimensions	Standard Finishes	White Tapelight Models													
			LED-L1.5W	LED-L2.2W	LED-L2.5W	LED-LTP2.5W	LED-LTW2.7W	LED-LCOB3.0W	LED-L3.5W	LED-LWF3.5W	LED-LHE3.5W	LED-LHE4.0W	LED-L4.4W	LED-LHE4.4W	LED-LTP5.0W	LED-LTW5.3W
Angled (ANG)												-				
			IP20	IP20	IP20	IP20	IP20	IP20	IP20	IP20	IP20	-	IP20	IP20	IP20	IP20
			IP65	IP65	IP65	IP65	IP65	IP65	IP65	-	IP65	-	IP65	IP65	IP65	IP65
Angled 2 (ANG2)																
			IP20	IP20	IP20	IP20	IP20	IP20	IP20	IP20	IP20	IP20	IP20	IP20	IP20	IP20
			IP65	IP65	IP65	IP65	IP65	IP65	IP65	IP67	IP65	IP65	IP65	IP65	IP65	IP65
Deep (DEP)												-				
			IP20	IP20	IP20	IP20	IP20	IP20	IP20	IP20	IP20	-	IP20	IP20	IP20	IP20
			IP65	IP65	IP65	IP65	IP65	IP65	IP65	-	IP65	-	IP65	IP65	IP65	IP65
Deep Wide (DPW)																
			IP20	IP20	IP20	IP20	IP20	IP20	IP20	IP20	IP20	IP20	IP20	IP20	IP20	IP20
			IP65	IP65	IP65	IP65	IP65	IP65	IP65	IP67	IP65	IP65	IP65	IP65	IP65	IP65
Grazer (GZR)												-				
			IP20	IP20	IP20	IP20	IP20	IP20	IP20	IP20	IP20	-	IP20	IP20	IP20	IP20
			IP65	IP65	IP65	IP65	IP65	IP65	IP65	-	IP65	-	IP65	IP65	IP65	IP65
Icon (ICN)																
			IP20	IP20	IP20	IP20	IP20	IP20	IP20	IP20	IP20	IP20	IP20	IP20	IP20	IP20
			IP65	IP65	IP65	IP65	IP65	IP65	IP65	IP67	IP65	IP65	IP65	IP65	IP65	IP65
Icon 1 (IC1)												-				
			IP20	IP20	IP20	IP20	IP20	IP20	IP20	IP20	IP20	-	IP20	IP20	IP20	IP20
			IP65	IP65	IP65	IP65	IP65	IP65	IP65	-	IP65	-	IP65	IP65	IP65	IP65
Thin (THN)												-				
			IP20	IP20	IP20	IP20	IP20	IP20	IP20	IP20	IP20	-	IP20	IP20	IP20	IP20
			IP65	IP65	IP65	IP65	IP65	IP65	IP65	-	IP65	-	IP65	IP65	IP65	IP65
Wide (WID)																
			IP20	IP20	IP20	IP20	IP20	IP20	IP20	IP20	IP20	IP20	IP20	IP20	IP20	IP20
			IP65	IP65	IP65	IP65	IP65	IP65	IP65	IP67	IP65	IP65	IP65	IP65	IP65	IP65
Seamless 1.0 (SM1)																
			IP20	IP20	IP20	IP20	IP20	IP20	IP20	IP20	IP20	IP20	IP20	IP20	IP20	IP20
			IP65	IP65	IP65	IP65	IP65	IP65	IP65	IP67	IP65	IP65	IP65	IP65	IP65	IP65
Seamless Curve (SMC)												-				
			IP20	IP20	IP20	IP20	IP20	IP20	IP20	IP20	IP20	-	IP20	IP20	IP20	IP20
			IP65	IP65	IP65	IP65	IP65	IP65	IP65	-	IP65	-	IP65	IP65	IP65	IP65


							Color Tapelight Models										Compatible Accessory		
	LED-LRA5.4W	LED-LTP5.9W	LED-LHE5.9W	LED-LHE6.6W	LED-LHE7.9W	LED-L8.8W	LED-LC2.2W	LED-LC4.4W	LED-LCC4.4W	LED-LTPCC4.4W	LED-LCCW4.4W	LED-LCTW4.4W	LED-LCCW5.8W	LED-LCC5.9W	LED-LCCW7.6W	LED-LCCW8.8W	Gripper, 10mm	Gripper, 12mm	Block Connector, 10mm
				-	-	-							-	-	-	-			
	IP20	IP20	IP20	-	-	-	IP20	IP20	IP20	IP20	IP20	IP20	-	-	-	-	-	-	-
	IP65	IP65	IP65	-	-	-	IP65	IP65	IP65	IP65	IP65	IP65	-	-	-	-	-	-	-
	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
					-														
	IP20	IP20	IP20	IP20	-	IP20	IP20	IP20	IP20	IP20	IP20	IP20	IP20	IP20	IP20	IP20	✓	✓	✓
	IP65	IP65	IP65	IP65	-	IP65	IP65	IP65	IP65	IP65	IP65	IP65	IP65	IP65	IP65	IP65	✓	✓	-
	-	-	-	IP68	-	IP68	IP68	IP68	IP68	IP68	IP68	IP68	IP68	-	IP68	-	-	-	-
				-	-	-					-					-			
	IP20	IP20	IP20	-	-	-	IP20	IP20	IP20	IP20	-	IP20	IP20	IP20	IP20	-	-	-	✓
	IP65	IP65	IP65	-	-	-	IP65	IP65	IP65	IP65	-	IP65	IP65	IP65	IP65	-	-	-	-
	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
					-											-			
	IP20	IP20	IP20	IP20	-	IP20	IP20	IP20	IP20	IP20	IP20	IP20	IP20	IP20	IP20	-	✓	✓	✓
	IP65	IP65	IP65	IP65	-	IP65	IP65	IP65	IP65	IP65	IP65	IP65	IP65	IP65	IP65	-	✓	✓	-
	IP68	-	-	-	-	-	IP68	IP68	IP68	IP68	-	IP68	-	-	IP68	-	-	-	-
				-	-	-					-		-		-	-			
	IP20	IP20	IP20	-	-	-	IP20	IP20	IP20	IP20	-	IP20	-	IP20	-	-	-	-	✓
	IP65	IP65	IP65	-	-	-	IP65	IP65	IP65	IP65	-	IP65	-	IP65	-	-	-	-	-
	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
																			
	IP20	IP20	IP20	IP20	IP20	IP20	IP20	IP20	IP20	IP20	IP20	IP20	IP20	IP20	IP20	IP20	✓	✓	✓
	IP65	IP65	IP65	IP65	IP65	IP65	IP65	IP65	IP65	IP65	IP65	IP65	IP65	IP65	IP65	IP65	✓	✓	-
	IP68	-	-	-	-	IP68	IP68	IP68	IP68	IP68	IP68	IP68	IP68	-	IP68	-	-	-	-
				-	-	-					-					-			
	IP20	IP20	IP20	-	-	-	IP20	IP20	IP20	IP20	-	IP20	IP20	IP20	IP20	-	-	-	✓
	IP65	IP65	IP65	-	-	-	IP65	IP65	IP65	IP65	-	IP65	IP65	IP65	IP65	-	-	-	-
	IP68	-	-	-	-	-	IP68	IP68	IP68	IP68	-	IP68	IP68	IP68	IP68	-	-	-	-
				-	-	-					-		-		-	-			
	IP20	IP20	IP20	-	-	-	IP20	IP20	IP20	IP20	-	IP20	-	IP20	-	-	-	-	-
	IP65	IP65	IP65	-	-	-	IP65	IP65	IP65	IP65	-	IP65	-	IP65	-	-	-	-	-
	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
					-														
	IP20	IP20	IP20	IP20	-	IP20	IP20	IP20	IP20	IP20	IP20	IP20	IP20	IP20	IP20	IP20	✓	✓	✓
	IP65	IP65	IP65	IP65	-	IP65	IP65	IP65	IP65	IP65	IP65	IP65	IP65	IP65	IP65	IP65	✓	✓	-
	-	-	-	-	-	-	IP68	IP68	IP68	-	-	-	-	-	-	-	-	-	-
					-														
	IP20	IP20	IP20	IP20	-	IP20	IP20	IP20	IP20	IP20	IP20	IP20	IP20	IP20	IP20	IP20	✓	✓	✓
	IP65	IP65	IP65	IP65	-	IP65	IP65	IP65	IP65	IP65	IP65	IP65	IP65	IP65	IP65	IP65	✓	✓	-
	IP68	-	-	-	-	-	IP68	IP68	IP68	IP68	-	IP68	-	-	-	-	-	-	-
				-	-	-					-					-			
	IP20	IP20	IP20	-	-	-	IP20	IP20	IP20	IP20	-	IP20	IP20	IP20	IP20	-	-	-	✓
	IP65	IP65	IP65	-	-	-	IP65	IP65	IP65	IP65	-	IP65	IP65	IP65	IP65	-	-	-	-
	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-



IMAGING = ▲



SEMI-UNIFORM = ●



UNIFORM = ■

DIMMABLE MAGNETIC LED DRIVER



- Constant output voltage, 12V or 24V
- Dimming power supply
- Thermal primary and secondary self reset breakers
- Optimal performance dims to 5-10%.*



TECHNICAL INFORMATION

*NOTES: For optimal performance recommended loading is 80%. Performance can be affected by driver loading and dimmer type. For dimmer compatibility information, see page 4.

	INPUT	OUTPUT	WATTAGE	OPERATING TEMP.	WEIGHT	CLASS	RATING
LED-PS-DM-020W-XXV-KO	120/277V	12V/24V	20W	Do not exceed 149° F	1.6 LB	Class 2	NEMA 3R
LED-PS-DM-040W-XXV-KO	120/277V	12V/24V	40W	Do not exceed 149° F	2.3 LB	Class 2	NEMA 3R
LED-PS-DM-060W-XXV-KO	120/277V	12V/24V	60W	Do not exceed 149° F	4.1 LB	Class 2	NEMA 3R
LED-PS-DM-100W-XXV-KO	120/277V	12V/24V	100W	Do not exceed 149° F	4.6 LB	Class 2	NEMA 3R
LED-PS-DM-150W-XXV-KO	120/277V	12V/24V	150W	Do not exceed 149° F	7.2 LB	Class 1	NEMA 3R
LED-PS-DM-150W-12V-CL2-KO	120/277V	12V	3 x 50W	Do not exceed 149° F	8.5 LB	Class 2	NEMA 3R
LED-PS-DM-200W-XXV-KO	120/277V	12V/24V	200W	Do not exceed 149° F	7.7 LB	Class 1	NEMA 3R
LED-PS-DM-300W-XXV-KO	120/277V	12V/24V	300W	Do not exceed 149° F	8.4 LB	Class 1	NEMA 3R
LED-PS-DM-300W-XXV-CL2-KO	120/277V	12V/24V	6 x 50W	Do not exceed 149° F	10 LB	Class 2	NEMA 3R
LED-PS-DM-600W-XXV-KO	120/277V	12V/24V	2 x 300W	Do not exceed 149° F	18 LB	Class 1	NEMA 3R

PART NUMBER BUILDER / ORDERING GUIDE

Example part number: LLI-PS-DM-100W-24V-CL2-KO

SERIES	WATTAGE	OUTPUT	CLASS	INPUT	KNOCKOUT
LED-PS-DM					KO
	020W	12V	blank - CL1	blank - 120V	
	040W	24V	CL2 - Class 2	277V	
	060W				
	100W				
	150W				
	200W				
	300W				
	600W				

NON-DIMMABLE ELECTRONIC LED DRIVER



- Constant output voltage, 12V or 24V
- Non-dimming power supply
- Variable input voltage 100-277V
- Auto-reset breakers: Short circuit, overload, and thermal protection



TECHNICAL INFORMATION

NOTES: For optimal performance, recommended loading is 80%.

	INPUT	OUTPUT	WATTAGE	OPERATING TEMP.	CLASS	RATING
LED-PS-NDE-030W-XXV-KO	100-277V	12V/24V	30W	Do not exceed 149° F	Class 2	IP66 - Wet Location
LED-PS-NDE-060W-XXV-KO	100-277V	12V/24V	60W	Do not exceed 149° F	Class 2	IP66 - Wet Location
LED-PS-NDE-096W-24V-KO	100-277V	24V	96W	Do not exceed 149° F	Class 2	IP66 - Wet Location
LED-PS-NDE-100W-12V-KO	100-277V	12V	100W	Do not exceed 149° F	Class 1	IP66 - Wet Location
LED-PS-NDE-200W-XXV-KO	100-277V	12V/24V	200W	Do not exceed 149° F	Class 1	IP66 - Wet Location
LED-PS-NDE-300W-XXV-KO	100-277V	12V/24V	300W (12V: 2 circuits, 150W each)	Do not exceed 149° F	Class 1	IP66 - Wet Location
LED-PS-NDE-600W-24V-KO	90-305V	24V	600W (2 circuits, 300W each)	Do not exceed 149° F	Class 1	IP67 - Wet Location

PART NUMBER BUILDER / ORDERING GUIDE


SERIES	WATTAGE	OUTPUT	KNOCKOUT
LED-PS-NDE			KO
	030W	12V	
	060W	24V	
	096W		
	100W		
	200W		
	300W		
	600W		

*NOTE: 096W, 600W version not available with 12V output.
100W version not available with 24V output.

DIMMABLE ELECTRONIC 0-10V LED DRIVER



- Constant voltage output
- 120V/277V input voltage
- Temperature protection with auto reset after cooling
- Short circuit protection
- Overload protection with auto reset
- Optimal performance dims to 0%*
- Compliant with IEEE Standard 1789-2015 for flicker free operation



TECHNICAL INFORMATION

*NOTES: For optimal performance recommended loading is 80%. Performance can be affected by driver loading and dimmer type.
For dimmer compatibility information, see page 4.

	INPUT	OUTPUT	WATTAGE	OPERATING TEMP	WEIGHT	CLASS	RATING
LED-PS-DE010-030W-24V-KO	120/277V	24V	30W	Do not exceed 140° F	2.1 LBS	Class 2	IP66 Wet Location
LED-PS-DE010-060W-24V-KO	120/277V	24V	60W	Do not exceed 140° F	2.4 LBS	Class 2	IP66 Wet Location
LED-PS-DE010-096W-24V-KO	120/277V	24V	96W	Do not exceed 140° F	2.9 LBS	Class 2	IP66 Wet Location
LED-PS-DE010-200W-24V-KO	120/277V	24V	200W	Do not exceed 140° F	3.3 LBS	Class 1	IP66 Wet Location
LED-PS-DE010-300W-24V-KO	120/277V	24V	300W	Do not exceed 140° F	4.0 LBS	Class 1	IP66 Wet Location

PART NUMBER BUILDER / ORDERING GUIDE

Example part number: LED-PS-DE010-200W-24V-KO

SERIES	WATTAGE	LENS	KNOCKOUT
LED-PS-DE010	-	-	-
	030W	24V	KO
	060W		
	096W		
	200W		
	300W		

UNIVERSAL FLICKER FREE DIMMABLE DRIVER



- Compatible w/ Triac and ELV dimmers
- 800 Hz, flicker free performance to the human eye (some flicker may be visible when recorded on video)
- Compliant with IEEE Standard 1789-2015 for flicker free operation
- Smooth, flicker free dimming (optimal performance dims to 2%*)
- Commercial grade housing with enclosure
- Variable input voltage, 110-277VAC
- Auto-reset breakers: Short circuit, overload, and thermal protection



TECHNICAL INFORMATION

*NOTES: Performance can be affected by driver loading and dimmer type. For optimal performance recommended loading is 80% of rated capacity. Minimum load requirement is 10% of rated capacity to achieve flicker free performance. For dimmer compatibility information, see page 4.

	INPUT	OUTPUT	CAPACITY	POWER FACTOR	OPERATING TEMP	WEIGHT	CLASS	DRIVER RATING & COMPLIANCE	
LED-PS-UDEFF-030W	110-277V	24V	30W	0.98	-40°F to 140°F	2.1 LBS	Class 2	IP66 WET	
LED-PS-UDEFF-060W	110-277V	24V	60W	0.98	-40°F to 140°F	2.4 LBS	Class 2	IP66 WET	TITLE 24 COMPLIANT
LED-PS-UDEFF-096W	110-277V	24V	96W	0.98	-40°F to 140°F	2.9 LBS	Class 2	IP66 WET	TITLE 24 COMPLIANT
LED-PS-UDEFF-200W	110-277V	24V	200W	0.98	-40°F to 140°F	3.3 LBS	Class 1	IP66 WET	TITLE 24 COMPLIANT
LED-PS-UDEFF-300W	110-277V	24V	300W	0.98	-40°F to 140°F	4.0 LBS	Class 1	IP66 WET	

PART NUMBER BUILDER / ORDERING GUIDE

Example part number: LED-PS-UDEFF-030W-24V-KO

SERIES	WATTAGE	OUTPUT	KNOCKOUT
LED-PS-UDEFF	-	24V	- KO
	030W		
	060W		
	096W		
	200W		
	300W		

UNIVERSAL DIMMING ELECTRONIC LED DRIVERS (TRIAC / 0-10V)



- Constant voltage output
- 100V-277V input voltage
- Temperature protection with auto reset after cooling
- Short circuit protection
- Overload protection with auto reset
- Optimal performance dims to 0%*
- Compliant with IEEE Standard 1789-2015 for flicker free operation
- Compliant with IEEE Standard 1789-2015 for flicker free operation
- 5-in-1 dimming: TRIAC/phase, 0-10V, 1-10V, Potentiometer, and 10V PWM Signal

*NOTES: For optimal performance recommended loading is 80%.
Performance can be affected by driver loading and dimmer type.



TECHNICAL INFORMATION

	INPUT	OUTPUT	WATTAGE	OPERATING TEMP	WEIGHT	DIMENSIONS	CLASS	RATING
LED-TDIM5/1DRIVER60W24V	100V-277V	24V	60W (1x60W)	Do not exceed 140° F	2.4 LBS	7.4"L x 3.7"W x 1.6"H	Class 2	IP66 Wet Location
LED-TDIM5/1DRIVER96W24V	100V-277V	24V	96W (1x96W)	Do not exceed 140° F	2.9 LBS	8.7"L x 3.7"W x 1.6"H	Class 2	IP66 Wet Location
LED-TDIM5/1DRIVER192W24V	100V-277V	24V	192W (2x96W)	Do not exceed 140° F	5.1 LBS	10.9"L x 4.3"W x 1.8"H	Class 2	IP66 Wet Location
LED-TDIM5/1DRIVER288W24V	100V-277V	24V	288W (3x96W)	Do not exceed 140° F	5.3 LBS	11.8"L x 4.3"W x 1.8"H	Class 2	IP66 Wet Location
LED-TDIM5/1DRIVER384W24V	100V-277V	24V	384W (4x96W)	Do not exceed 140° F	5.9 LBS	12.8"L x 5.5"W x 1.9"H	Class 2	IP66 Wet Location

PART NUMBER BUILDER / ORDERING GUIDE

SERIES	WATTAGE	VOLTAGE
LED-TDIM5/1DRIVER	-	24V
	60W	
	96W	
	192W	
	288W	
	384W	

DMX DIMMABLE POWER SUPPLY & DECODER

75W
96W



200W



TECHNICAL INFORMATION

INPUT VOLTAGE	100 - 277 VAC 50/60Hz
OUTPUT VOLTAGE	24V constant voltage
OUTPUT CAPACITY	75W - Class 2 96W - Class 2 200W - Class 1
DIMMING	PWM digital dimming, 0.1-100% Logarithmic or linear dimming curve selectable
IP RATING	IP20 - dry locations
PROTECTION	Over-current and over-temperature protection: auto recover after fault condition is resolved
OPERATING TEMP	-4° to 113° F
PROTOCOL	DMX512

DMX ADDRESSABILITY


512 addressable DMX channels with digital display

PART NUMBER BUILDER / ORDERING GUIDE


SERIES	PROTOCOL	CAPACITY	OUTPUT
LED-PS-DEC	-	DMX512	-
		075W	24V
		096W	
		200W	

DIMENSIONS

75W
96W

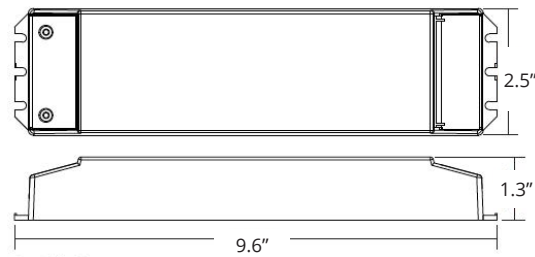

200W

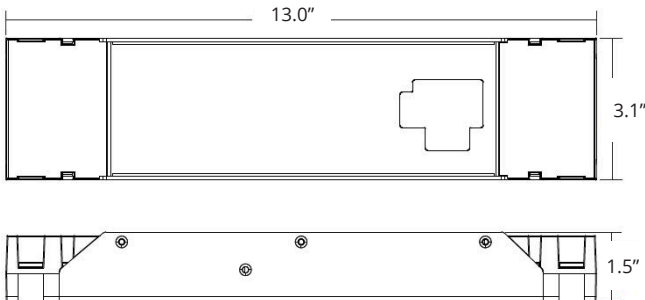

LUTRON HI-LUME PREMIER 0.1% ECOSYSTEM / 3-WIRE




PART NUMBER

SERIES	CAPACITY	VOLTAGE
L3D0	96W	24V
		U

DESCRIPTION

- Continuous, flicker-free dimming from 100% to 0.1%.
- Soft-on, Fade-to-Black operation for EcoSystem controls: fades smoothly between 0% and 0.1% when turned on and off for an incandescent-like experience.
- PWM dimming meets IEEE1789 over the entire dimming range.
- Smooth, flicker free dimming to 0.1% low-end.
- Commercial grade housing with wiring compartments.
- Field Adjustment Knob offers customer low-end light output tuning for better fixture-to-fixture matching.

DIMENSIONS

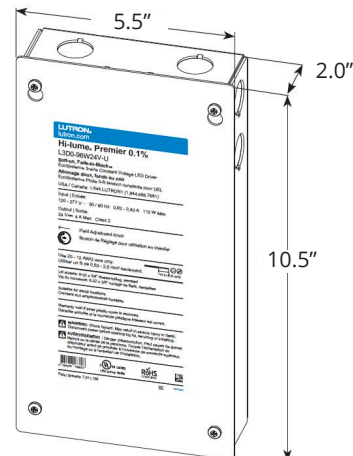

NON-DIMMABLE PLUG-IN LED DRIVER



- Constant voltage
- Non-dimming power supply
- Plug in type
- Indoor dry locations only

5 YEAR
LIMITED
WARRANTY



TECHNICAL INFORMATION

NOTE: For optimal performance recommended loading is 80%.

	INPUT	OUTPUT	WATTAGE	CLASS	TYPE
LED-PS-NDEP-006W	120V	12V/24V	6W	Class 2	2-Prong plug/ Barrel Connec-
LED-PS-NDEP-012W	120V	12V/24V	12W	Class 2	2-Prong plug/ Barrel Connec-
LED-PS-NDEP-024W	120V	12V/24V	24W	Class 2	2-Prong plug/ Barrel Connec-
LED-PS-NDEP-036W	120V	12V/24V	36W	Class 2	2-Prong plug/ Barrel Connec-
LED-PS-NDEP-072W	120V	12V/24V	72W	12V - Class 1 24V - Class 2	3-Prong plug/ Barrel Connec-
LED-PS-NDEP-096W	120V	12V/24V	96W	12V - Class 1 24V - Class 2	3-Prong plug/ Barrel Connec-

PART NUMBER BUILDER / ORDERING GUIDE

Example part number: LED-PS-NDE-100W-12V

SERIES	WATTAGE	OUTPUT
LED-PS-NDEP	-	-
	006W	12V
	012W	24V
	024W	
	036W	
	072W	
	096W	

NON-DIMMABLE ELECTRONIC LED DRIVER, 24VDC



- Constant output voltage, 24V
- Non-dimming power supply
- Variable input voltage 90-264V



TECHNICAL INFORMATION

NOTES: For optimal performance, recommended loading is 80%.



INPUT	OUTPUT	WATTAGE	OPERATING TEMP.	CLASS	RATING
90-264V	24V	8W	Do not exceed 158° F	Class 2	IP42 - Dry Location

PART NUMBER BUILDER / ORDERING GUIDE


SERIES	WATTAGE	OUTPUT
LED-PS-NDE	008W	24V

DIMENSIONS & WIRING DIAGRAM

Dimensions

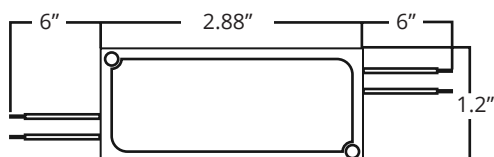

Wiring Diagram



QUICK SPECIFICATIONS


LOCATION RATING	Indoor only
FUNCTION	Static color, tunable white, RGB(W) LEDs
CHANNELS	4 Channels, 8 Amp
CAPACITY	12V - 96W maximum
	24V - 192W maximum

DMX ADDRESSABILITY

512 addressable DMX channels with digital display

POWER


Power supply not included. 12V or 24V power supply required.

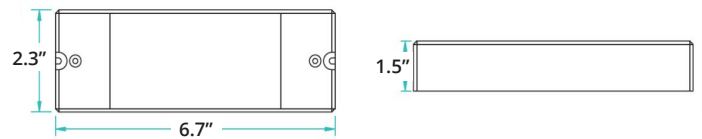


PART NUMBER

SERIES	TYPE	CAPACITY
LED-C-DEC	- DMX512	- 8A

WIRING DIAGRAM

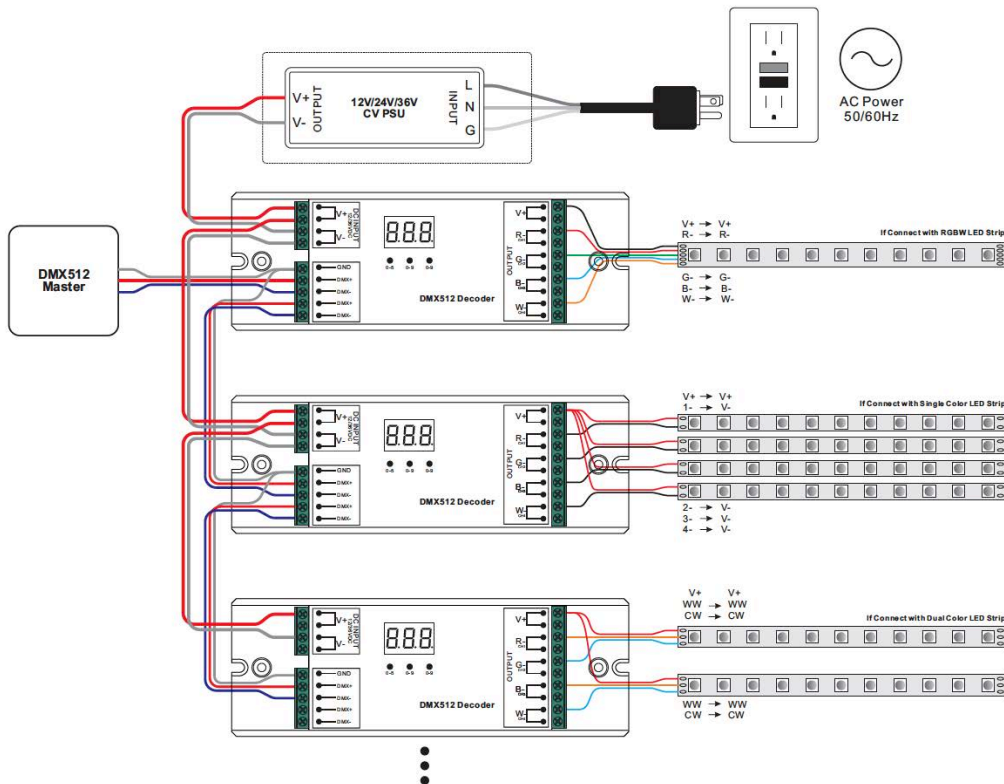

DMX DECODER, IP67 WET RATED

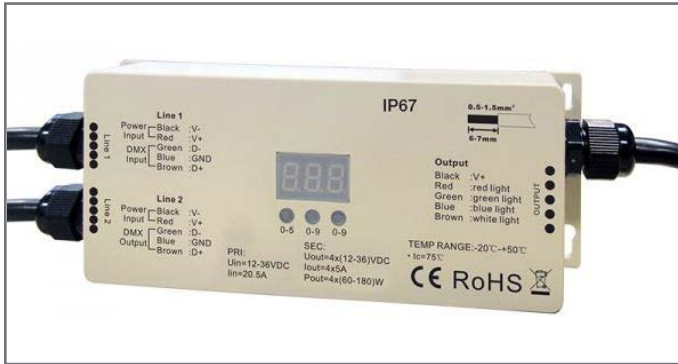

PART NUMBER

SERIES	TYPE	CAPACITY	LOCATION
LED-C-DEC	- DMX512	- 5A	- WET

QUICK SPECIFICATIONS


LOCATION RATING	IP67 - wet locations. Do not submerge. Limited protection against harsh environments.
FUNCTION	Static color, tunable white, RGB(W) LEDs
CHANNELS	4 Channels, 5 Amp
CAPACITY	12V - 60W maximum 24V - 120W maximum

DMX ADDRESSABILITY


512 addressable DMX channels with digital display

POWER

Power supply not included. 12V or 24V power supply required.

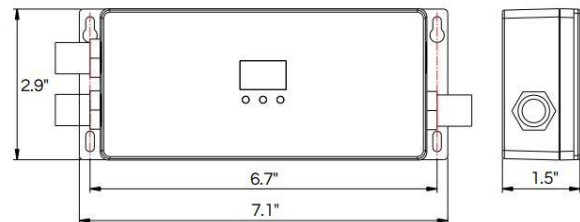

WIRING DIAGRAM

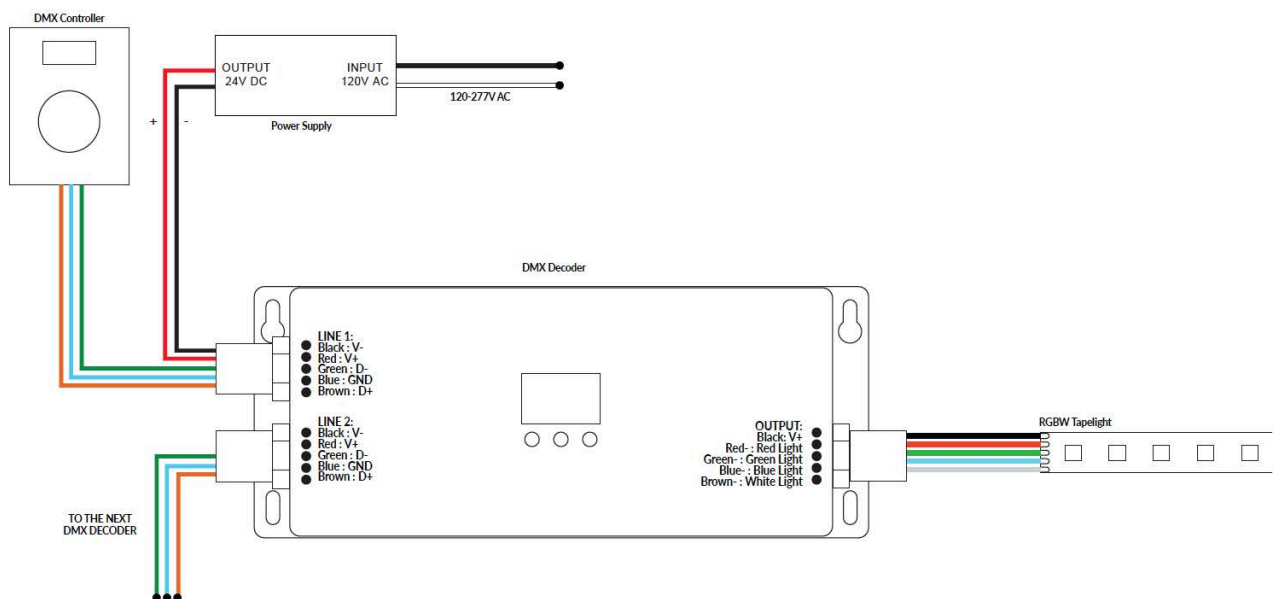



QUICK SPECIFICATIONS

OUTPUT	8A maximum, 5 channels
IP RATING	IP20 - dry locations
FUNCTION	RDM communication and PWM dimming for static white, single color, tunable white, RGB(W), and tunable white RGBW LEDs
CAPACITY	12V - 96W maximum 24V - 192W maximum
COMPATIBILITY	Compatible with LLI-C-CTRL-DMX controllers
WARRANTY	5 year limited

PART NUMBER


SERIES	PROTOCOL	CAPACITY	COMM.
LED-C-DEC	DMX512	8A	RDM

FEATURES


Can be controlled by up to eight (8) controllers.
Can be synchronized with twenty (20) decoders.

POWER

Power supply not included. 12V/24V non-dimming power supply required.

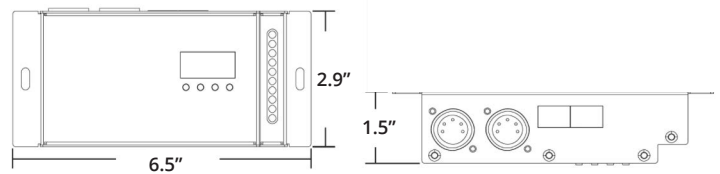

WIRING DIAGRAM

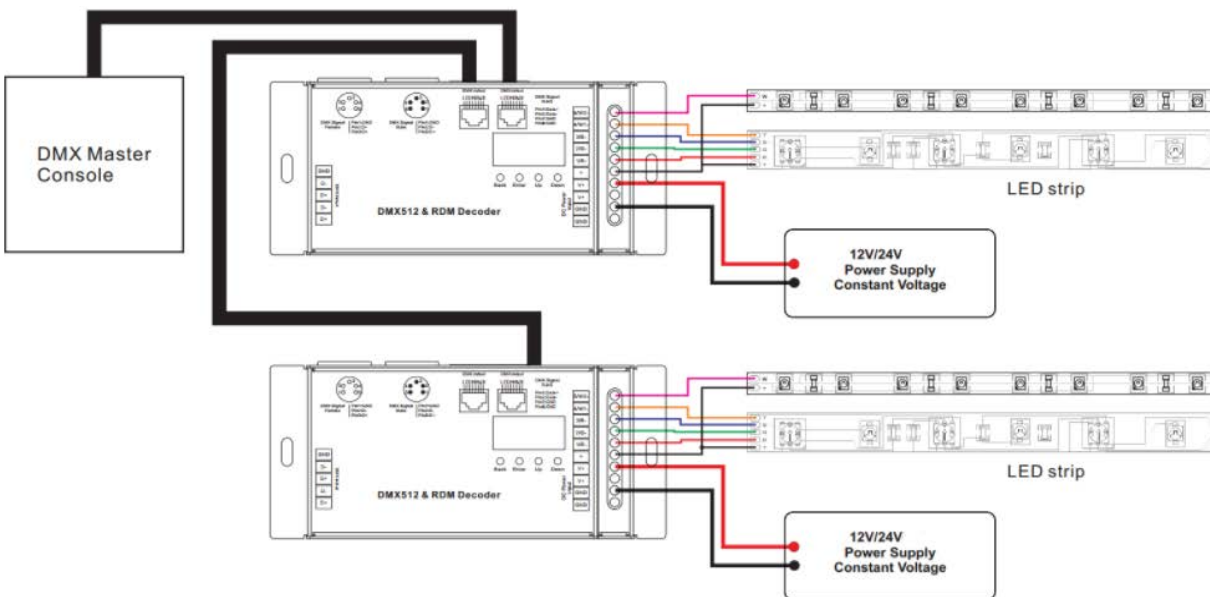


UNIVERSAL RF RECEIVER

UNIVERSAL - INDOOR

LED-C-RCV-UR-RF-4CH


CONTROLLER COMPATIBILITY	Compatible with all RF LLI-C-CTRL controllers.
LED COMPATIBILITY	Static Color, Tunable White & RGB(W) LEDs
CHANNELS	4 Channel, 8 Amp
INPUT VOLTAGE	12V / 24V (power supply not included)
CAPACITY	12V - 96W 24V - 192W
FEATURES	Can be controlled by up to (8) controllers Can be synchronized with unlimited receivers up to 320ft away



UNIVERSAL - WET

LED-C-RCV-U-RF-4CH-WET

CONTROLLER COMPATIBILITY	Compatible with all RF LLI-C-CTRL controllers.
IP RATING	IP66
LED COMPATIBILITY	Static Color, Tunable White & RGB(W) LEDs
CHANNELS	4 Channel, 8 Amp
INPUT VOLTAGE	12V / 24V (power supply not included)
CAPACITY	12V - 96W 24V - 192W
OPERATING TEMP.	Maximum 167°F
FEATURES	Can be controlled by up to (8) controllers Can be synchronized with (20) receivers

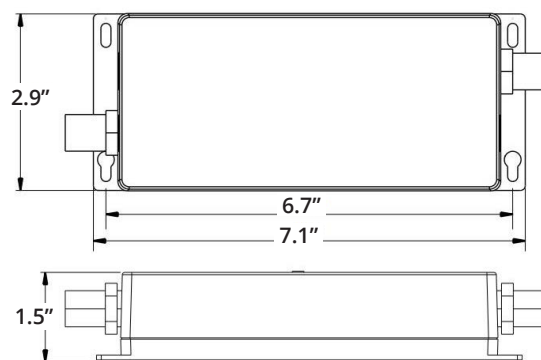



RF WIRELESS HAND HELD CONTROLLER



RGBW CONTROLLER



TUNABLE WHITE CONTROLLER

5 YEAR
LIMITED
WARRANTY

PART NUMBER

SERIES

LED-C-CTRL

FUNCTION

RGBW RGB(W)

TW Tunable White

STYLE

HH

HH Hand held

QUICK SPECIFICATIONS

LED TAPELIGHT
COMPATIBILITY

Compatible with 12-24V DC LED tapelights

PROTOCOL

RF signal

ZONES


4 zones, 3 scenes

WARRANTY


5 year limited

POWER

Battery operated.
3 AAA batteries not included.

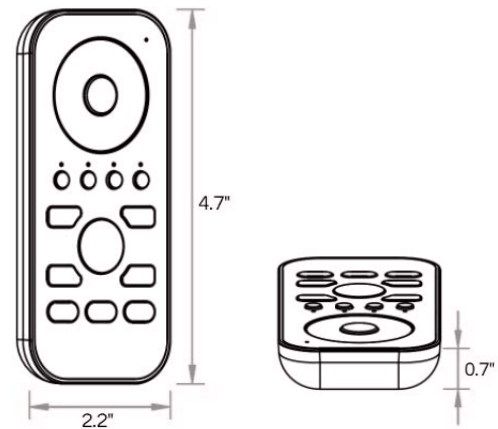

EXAMPLE WIRING DIAGRAM POWER SUPPLY, RECEIVER, AND LED TAPELIGHT SOLD SEPARATELY

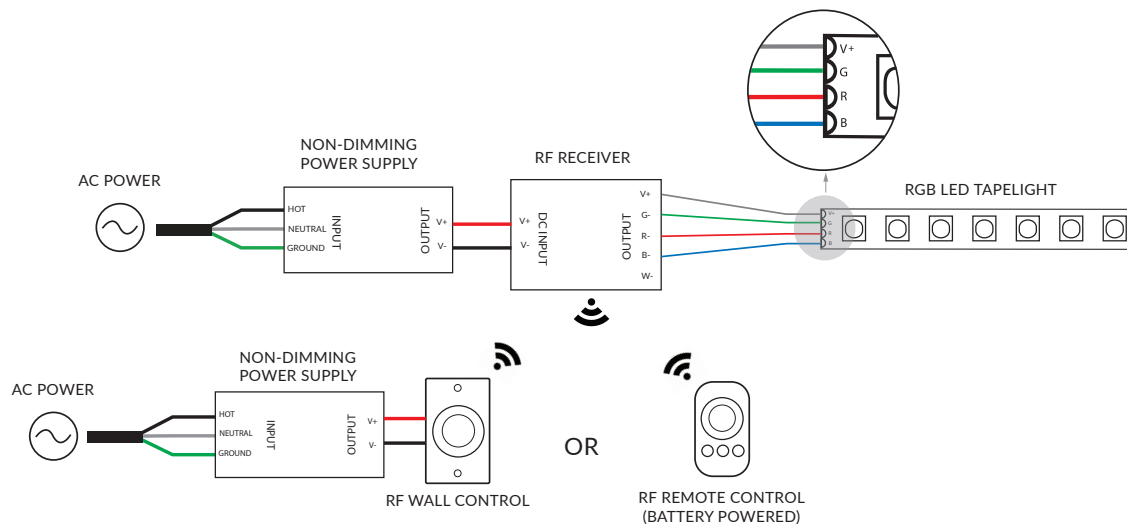

STAND ALONE DMX CONTROLLER, STICK-CW4



Black glass finish



White glass finish




PART NUMBER

SERIES	PROTOCOL	TYPE	FINISH
LED-C-CTRL	-	DMX	-
		STICK-CW4	-
			BL Black glass
			WH White glass

POWER OPTIONS

Power and DMX cable connections are available on the screw-terminal connector. Controller may be powered by Power + DMX RJ45 cable instead.

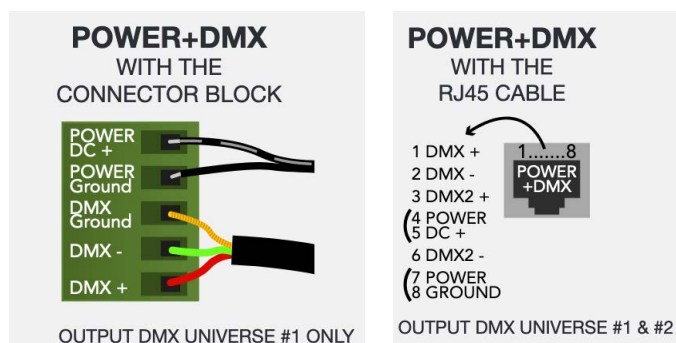


NOTE: Do not apply power to the DMX input. Doing so will damage the controller and void the warranty.

QUICK SPECIFICATIONS


INCLUDED IN PACKAGE	Controller, connector block, power supply, mini-USB cable, ESA2 software, ESA Pro2 Software
OS/COMPUTER REQUIREMENTS	Mac OSx 10.6 or higher / Windows XP or higher
PROGRAM SOFTWARE	Easy Stand Alone, ESA2 (Mac/Windows)
CONNECTIONS	Power/DMX - screw terminal and RJ45 Programming - miniUSB port
POWER SUPPLY	Requires 5-10VDC 0.6A power supply (included)
MEMORY	Integrated flash memory
WEIGHT	0.44 lb (200g)
MOUNTING	Single or double gang wall box
IP RATING	IP20 - dry locations only
WARRANTY	5 year limited

FEATURES

- Compatible with any DMX LED driver
- Can be controlled directly from a computer, smart-phone, or tablet
- Touch-sensitive buttons, glass face
- Up to 36 dynamic or static scenes
- 8 port triggers
- 1024 DMX channels control up to 340 RGB fixtures
- Windows/Mac software for programming dynamic

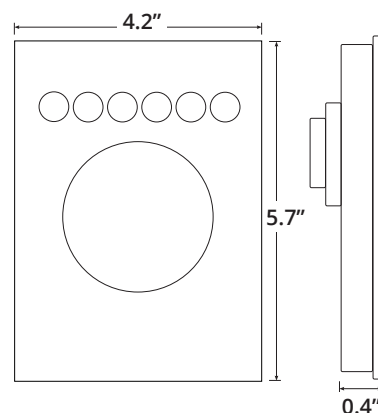

Programmable DMX Controller DE3

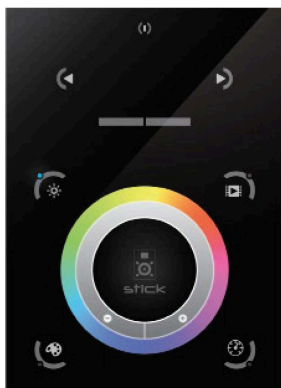

PART NUMBER

SERIES

LED-C-CTRL

PROTOCOL


DMX

TYPE

STICK-DE3

POWER OPTIONS

Power and DMX cable connections shown on screw-terminal connector. Controller may be powered by Power + DMX RJ45 cable instead

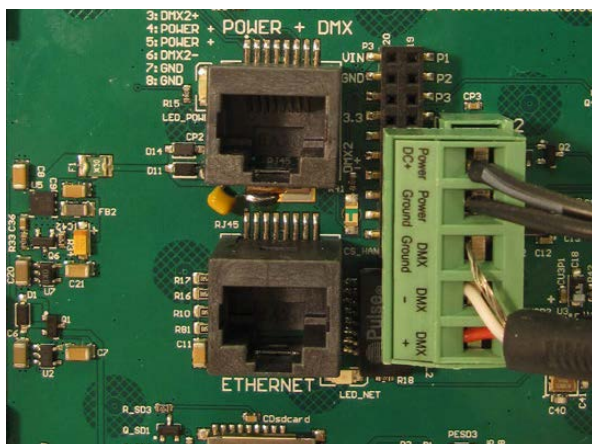


NOTE: Do not apply power to the DMX screw-terminal input. Doing so will damage the controller and void the warranty.

QUICK SPECIFICATIONS

INCLUDED IN PACKAGE	Controller, connector block, power supply
OS/COMPUTER REQUIREMENTS	Mac OSx 10.6 or higher / Windows XP or higher / iOS phone or tablet / Android phone or tablet
PROGRAM SOFTWARE	Easy Stand Alone, ESA2 (Mac/Windows) DMX Lightpad 3 App (iOS/Android) Easy Remote App (iOS/Android)
CONNECTIONS	Power/DMX - screw terminal and RJ45 compatible Memory - MicroSD slot Programming - MicroUSB port
POWER SUPPLY	6VDC power supply (included)
MEMORY	MicroSD card (not included)
MOUNTING	Single or double gang wall box
IP RATING	IP20 - dry locations only
WARRANTY	5 year limited

FEATURES

- Compatible with any DMX LED driver
- Multi-zone microSD memory
- Multi-room control with 500 scenes, 10 zones
- Integrated clock and calendar for scheduling events
- Touch-sensitive buttons
- USB and Ethernet connectivity for programming
- Windows/Mac software for programming dynamic effects
- iPhone/iPad/Android apps for remote control and program

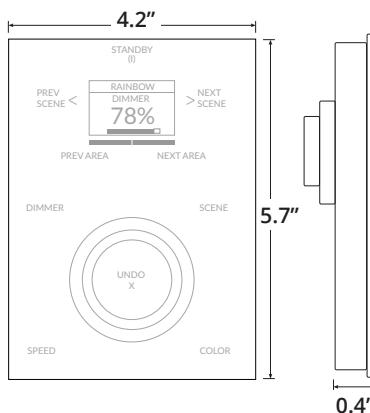

STAND ALONE DMX CONTROLLER, STICK-GU2



QUICK SPECIFICATIONS

INCLUDED IN PACKAGE	Controller, CD-ROM, USB cable, connector block, power supply
OS/COMPUTER REQUIREMENTS	Mac OSx 10.6 or higher / Windows XP or higher, USB 2.0 port
PROGRAM SOFTWARE	Easy Stand Alone, ESA2 (included)
CONNECTIONS	Power (2 pins), DMX (3 pins), Port (2 pins), Micro-USB Port
POWER SUPPLY	6VDC power supply (included)
MOUNTING	Single or double gang wall box
IP RATING	IP20 - dry locations only
WARRANTY	5 year limited

PART NUMBER


SERIES	PROTOCOL	TYPE
LED-C-CTRL	- DMX	- STICK-GU2

AVAILABLE MEMORY

CHANNELS	STEPS
8	1691
16	1011
32	557
48	383
64	291
80	233
96	195
112	166
128	145

FEATURES

- Compatible with any DMX LED driver
- Up to 24 dynamic or static scenes
- Wall mounted control panel with glass face, touch-sensitive buttons
- Programmable with included USB cable and software
- no Ethernet or WiFi required

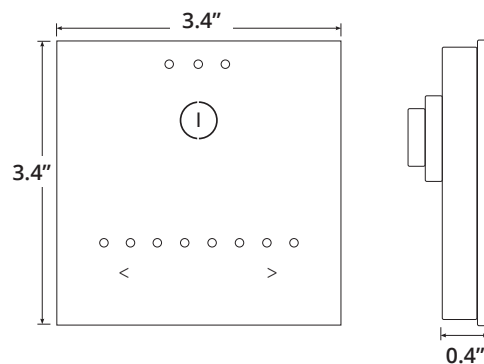

Touch Panel RGB(W) DMX Controller



RGBW CONTROLLER



TUNABLE WHITE CONTROLLER

5 YEAR
LIMITED
WARRANTY

PART NUMBER


SERIES	PROTOCOL	FUNCTION	STYLE
LED-C-CTRL			TP
	RF	RGBW RGB(W)	TP Touch Panel
	DMX DMX	TW Tunable White	

QUICK SPECIFICATIONS

LED TAPELIGHT COMPATIBILITY	Compatible with 12-24V DC LED tapelights
PROTOCOL	RF wireless or DMX hardwire
ZONES	RGBW - 3 zones Tunable White - 4 zones, 2 scenes
INTERFACE	Glass touch control
WARRANTY	5 year limited


POWER

Power supply for controller not included.
12-24V DC power supply required for controller.

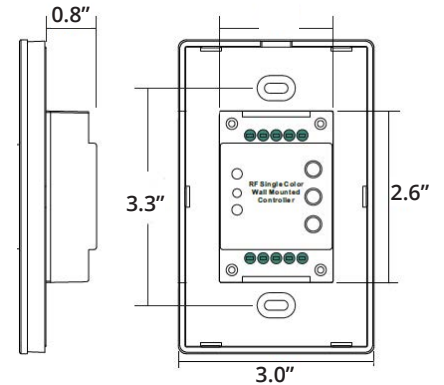

EXAMPLE RGB(W) RF WIRING DIAGRAM

POWER SUPPLY, RECEIVER, AND LED TAPELIGHT SOLD SEPARATELY

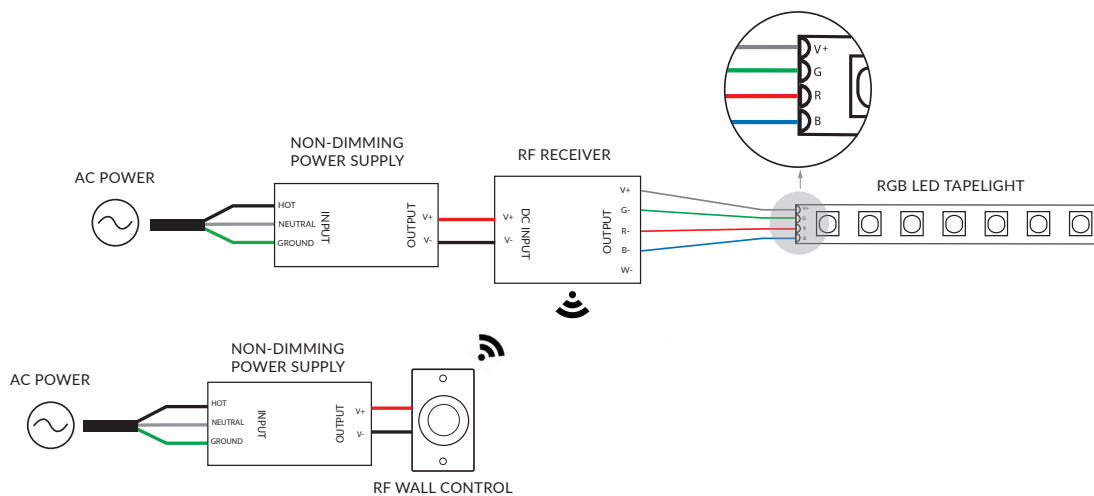

TUNABLE WHITE DIMMING MODULE




QUICK SPECIFICATIONS

LED TAPELIGHT COMPATIBILITY	Compatible with 24V DC tunable white LED tape lights
IP RATING	IP65 - wet locations. Not suitable for submersion.
CAPACITY	5A, 96W
OUTPUT CHANNELS	2
DIMMING	(2) Low Voltage dimmers required: one dimmer controls lumen intensity, the other dimmer controls color.
FREQUENCY	1KHz, Flicker-free 0-100% Dimming
OPERATING TEMP.	20°C – 60°C
PROTECTION	Hiccup-mode: auto-recovery after removing short circuit condition. Temperature protection: auto-recovery when temperature <105°C

POWER

Power supply not included.
Requires external non-dim power supply, 96W max.



PART NUMBER

SERIES	LED	VOLTAGE	CAPACITY
LED-PS-DIM-MOD	- TW	- 24V	- 96W

WIFI HUB



PART NUMBER

SERIES

LED-C-HUB

TYPE

WIFI

QUICK SPECIFICATIONS


RECEIVER COMPATIBILITY	Compatible with all RF receivers
FUNCTION	WIFI to RF converter for communicating to RF LED receiver from smart device
FEATURES	Enables control of LED tapelights via smartphone, tablet, or computer

POWER

5V DC power supply included.


MOBILE APP

Uses the EasyLighting EasyLife app, available for iOS and Android.

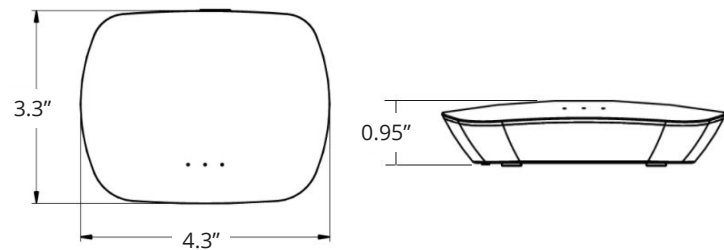


CONNECTION OPTION 1

Connection with RJ45
cable (not included)

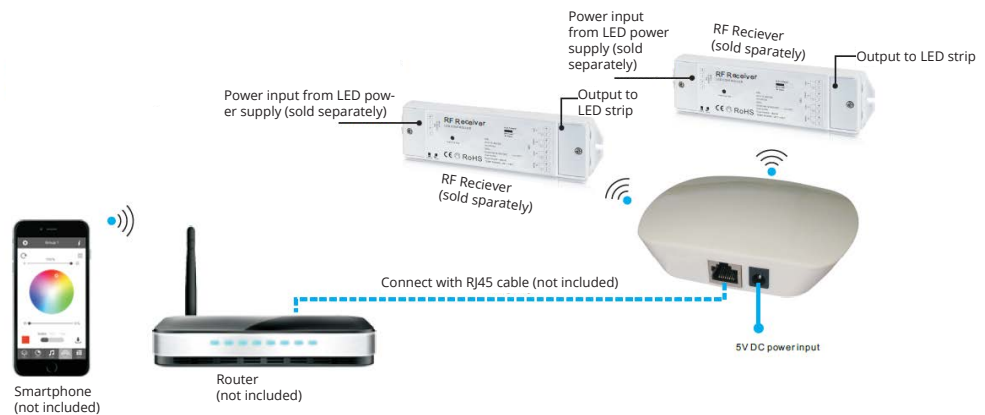

CONNECTION OPTION 2

WiFi connection between
smart device and Hub

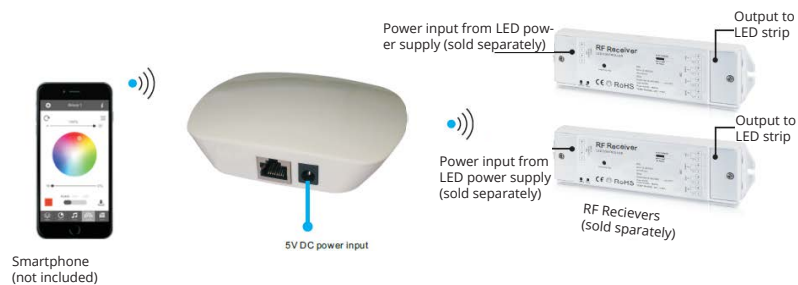




ACCESSORIES - BLOCK CONNECTOR

LED-TO-WIRE BLOCK CONNECTOR 2 Conductor / No Soldering



Connects LED section
to a jumper wire or power wire
(wire and tape connector sold separately)

SERIES	STYLE	LED TYPE	TAPE WIDTH
LED-BC	LW	— SC	10MM



0.44" L x 0.40" W x 0.31" H

Compatible with 10mm IP20 dry location tapes.
This product is NOT rated for use in wet locations.

WIRING

Wire not included, accepts 18-22 AWG Wire



WARNING - do not exceed 6A maximum load.



NOTE


Peel back adhesive before inserting LED tape into connector.

LED-TO-LED BLOCK CONNECTOR 2 Conductor / No Soldering



Connects LED section to another LED
section (LED tape sold separately)

SERIES	STYLE	LED TYPE	TAPE WIDTH
LED-BC	LL	— SC	10MM



0.44" L x 0.40" W x 0.31" H

Compatible with 10mm IP20 dry location tapes.
This product is NOT rated for use in wet locations.



WARNING - do not exceed 6A maximum load.



NOTE

Peel back adhesive before inserting LED tape into connector.

BLOCK CONNECTOR KITS

SERIES	STYLE	LED TYPE	TAPE WIDTH	KIT
LED-BC	LW	— SC	10MM	

R016 5 tape-to-wire connectors
1 tape-to-tape connector


R064 10 tape-to-wire connectors
2 tape-to-tape connectors

R100 20 tape-to-wire connectors
4 tape-to-tape connectors

LED-TO-LED BLOCK CONNECTOR JUMPER ASSEMBLY
2 Conductor / No Soldering



Connects 2 LED sections with 3" or 6" wire
(wire and connectors included, LED tapelight sold separately)



0.44" L x 0.40" W x 0.31" H

Compatible with 10mm IP20 dry location tapes.
This product is NOT rated for use in wet locations.

WIRING
3" or 6" length, 18 AWG

 **WARNING** - do not exceed 6A maximum load.



NOTE
Peel back adhesive before inserting LED tape into connector.

SERIES	TYPE	LED WIDTH	WIRE LENGTH
LED-BC-CON	SC	10MM	3IN 6IN

ACCESSORIES - SINGLE COLOR GRIPPER CONNECTOR

SINGLE COLOR LED-TO-WIRE GRIPPER CONNECT No Wire Stripping, No Soldering



Connects LED section to a jumper wire or a power wire back to the power supply

DIMENSIONS

0.96" L x 0.57" W x 0.30" H
Compatible with 10mm tapes only

INSTALLATION

No soldering or wire stripping required. Open both ends of the connector, insert LED tape and wiring, and tightly close connector.



WARNING, RISK OF FIRE -
do not exceed 5A maximum load.

Compatible with 10mm IP20 dry and IP65 wet location tapes. This product is NOT rated for use in wet locations.

WIRING

Wire not included, accepts 18-22 AWG Wire

	SERIES	STYLE	LED TYPE	TAPE WIDTH
LED		LW	SC	10MM
	GC	for IP20 tapelight		
	GCRD	for IP65 tapelight		

SINGLE COLOR LED-TO-LED GRIPPER CONNECT No Soldering



Connects LED section to another LED section

DIMENSIONS

0.77" L x 0.57" W x 0.30" H
Compatible with 10mm tapes only

INSTALLATION

No soldering required. Open both ends of the connector, insert LED tape, and tightly close connector.



WARNING, RISK OF FIRE -
do not exceed 5A maximum load.

Compatible with 10mm IP20 dry and IP65 wet location tapes. This product is NOT rated for use in wet locations.

	SERIES	STYLE	LED TYPE	TAPE WIDTH
LED		LL	SC	10MM
	GC	for IP20 tapelight		
	GCRD	for IP65 tapelight		

ACCESSORIES - RGB GRIPPER CONNECTOR

RGB LED-TO-WIRE GRIPPER CONNECT No Wire Stripping, No Soldering



Connects LED section to a jumper wire or power wire back to the power supply

DIMENSIONS

0.96" L x 0.57" W x 0.30" H

Compatible with 10mm RGB tapes only

INSTALLATION

No soldering or wire stripping required. Open both ends of the connector, insert LED tape and wiring, and tightly close connector.



WARNING, RISK OF FIRE - do not exceed 5A maximum load.

Compatible with 10mm IP20 dry and IP65 wet location tapes. This product is NOT rated for use in wet locations.

WIRING

Wire not included, accepts 18-22 AWG Wire

	SERIES	STYLE	LED TYPE	TAPE WIDTH
LED		LW	RGB	10MM
	GC for IP20 tapelight			
	GCRD for IP65 tapelight			

RGB LED-TO-LED GRIPPER CONNECT No Soldering



Connects LED section to another LED section

DIMENSIONS

0.77" L x 0.57" W x 0.30" H

Compatible with 10mm RGB tapes only

INSTALLATION

No soldering required. Open both ends of the connector, insert LED tape, and tightly close connector.



WARNING, RISK OF FIRE - do not exceed 5A maximum load.

Compatible with 10mm IP20 dry and IP65 wet location tapes. This product is NOT rated for use in wet locations.

	SERIES	STYLE	LED TYPE	TAPE WIDTH
LED		LL	RGB	10MM
	GC for IP20 tapelight			
	GCRD for IP65 tapelight			

ACCESSORIES - RGBW GRIPPER CONNECTOR

RGBW LED-TO-WIRE GRIPPER CONNECT No Wire Stripping, No Soldering



Connects LED section to a jumper wire or power wire back to the power supply

	SERIES	STYLE	LED TYPE	TAPE WIDTH
LED		LW	RGBW	12MM

GC for IP20 tapelight

GCRD for IP65 tapelight

DIMENSIONS

0.96" L x 0.67" W x 0.30" H

Compatible with 12mm RGBW tapes only

INSTALLATION

No soldering or wire stripping required. Open both ends of the connector, insert LED tape and wiring, and tightly close connector.



WARNING, RISK OF FIRE - do not exceed 5A maximum load.

Compatible with 12mm IP20 dry and IP65 wet location tapes. This product is NOT rated for use in wet locations.

WIRING

Wire not included, accepts 18-22 AWG Wire

RGBW LED-TO-LED GRIPPER CONNECT No Soldering



Connects LED section to another LED section

	SERIES	STYLE	LED TYPE	TAPE WIDTH
LED		LL	RGBW	12MM

GC for IP20 tapelight

GCRD for IP65 tapelight

DIMENSIONS

0.77" L x 0.67" W x 0.30" H

Compatible with 12mm RGBW tapes only

INSTALLATION

No soldering required. Open both ends of the connector, insert LED tape, and tightly close connector.



WARNING, RISK OF FIRE - do not exceed 5A maximum load.

Compatible with 12mm IP20 dry and IP65 wet location tapes. This product is NOT rated for use in wet locations.



QUICK SHIP PRODUCT

Quick ship items are stocked and are available in 1-2 weeks from receipt of purchase order, depending on the volume ordered

Extrusion

ANGLED



Finish: SA
Lens: Frosted, or clear
Length: 48IN or 94IN

[Additional information on product page:](#)

DEEP



Finish: SA
Lens: Frosted, or clear
Length: 48IN or 94IN

[Additional information on product page:](#)

THIN



Finish: SA
Lens: Frosted, or clear
Length: 48IN or 94IN

[Additional information on product page:](#)

WIDE



Finish: SA
Lens: Frosted
Length: 48IN or 94IN

[Additional information on product page:](#)

Extrusion + LED

ANGLED



Wattage: 1.5W/ft to 4.4W/ft
CCT: 2200K-5200K
Beam spread: 114° w/ frosted lens
Output: 161 – 526 lm/ft

[Additional information on product page:](#)

DEEP



Wattage: 1.5W/ft to 4.4W/ft
CCT: 2200K-5200K
Beam spread: 105° w/ frosted lens
Output: 161 – 526 lm/ft

[Additional information on product page:](#)

THIN



Wattage: 1.5W/ft to 4.4W/ft
CCT: 2200K-5200K
Beam spread: 105° w/ frosted lens
Output: 161 – 526 lm/ft

[Additional information on product page:](#)

WIDE



Wattage: 1.5W/ft to 4.4W/ft
CCT: 2200K-5200K
Beam spread: 109° w/ frosted lens
Output: 161 – 526 lm/ft

[Additional information on product page:](#)

White Tapelight

LED-L1.5W



Wattage: 1.5W/ft
Output: 161 lm/ft @30K
CCT: 27K, 30K, or 35K
Length: 60 ft max, per foot or reel
IP Rating: IP20

[Additional information on product page:](#)

LED-L2.2W



Wattage: 2.2W/ft
Output: 214 lm/ft @30K
CCT: 27K, 30K, or 35K
Length: 60 ft max, per foot or reel
IP Rating: IP20

[Additional information on product page:](#)

LED-L2.5W



Wattage: 2.5W/ft
Output: 212 lm/ft @30K
CCT: 27K, 30K, or 35K
Length: 32 ft max, per foot or reel
IP Rating: IP20

[Additional information on product page:](#)

LED-L4.4W



Wattage: 4.4W/ft
Output: 329 lm/ft @30K
CCT: 27K, 30K, or 35K
Length: 32 ft max, per foot or reel
IP Rating: IP20

[Additional information on product page:](#)

LED-LHE4.4W



Wattage: 4.4W/ft
Output: 526 lm/ft @30K
CCT: 27K, 30K, or 35K
Length: 32 ft max, per foot or reel
IP Rating: IP20

[Additional information on product page:](#)

RGB Tapelight

LED-LCC4.4W



Wattage: 4.4W/ft
Output: 119 lm/ft @30K
Color: RGB
Length: 32 ft max, per foot or reel
IP Rating: IP20

[Additional information on product page:](#)

Power Supply

LED-PS-UDEFF



Universal Dimmable Flicker-Free
LED Driver

[Additional information on product page:](#)



www.ledlightinginc.com
1553 Barclay Blvd.
Buffalo Grove, IL 60089
Phone: 847-412-4880
Fax: 847-412-4881
Email: cs@ledlightinginc.com

FOLLOW US



[instagram.com/ledlightinginc/](https://www.instagram.com/ledlightinginc/)



twitter.com/LEDLightingInc



facebook.com/LEDLightingInc



[linkedin.com/company/led-lighting-inc./](https://linkedin.com/company/led-lighting-inc/)